

AERODROME
CHART - ICAO

ARP
59°48'01"N
030°15'45"E


ELEV
79'

APRON 120.900 GROUND 121.700 TOWER 133.500 In CTR 1 during VFR flights.
RAMP 119.000 TOWER RWY 10R/28L 118.700
DELIVERY 121.900 TOWER RWY 10L/28R 118.100

SANKT-PETERBURG, RUSSIA

PULKOVO

PZ - 90.11 coordinates

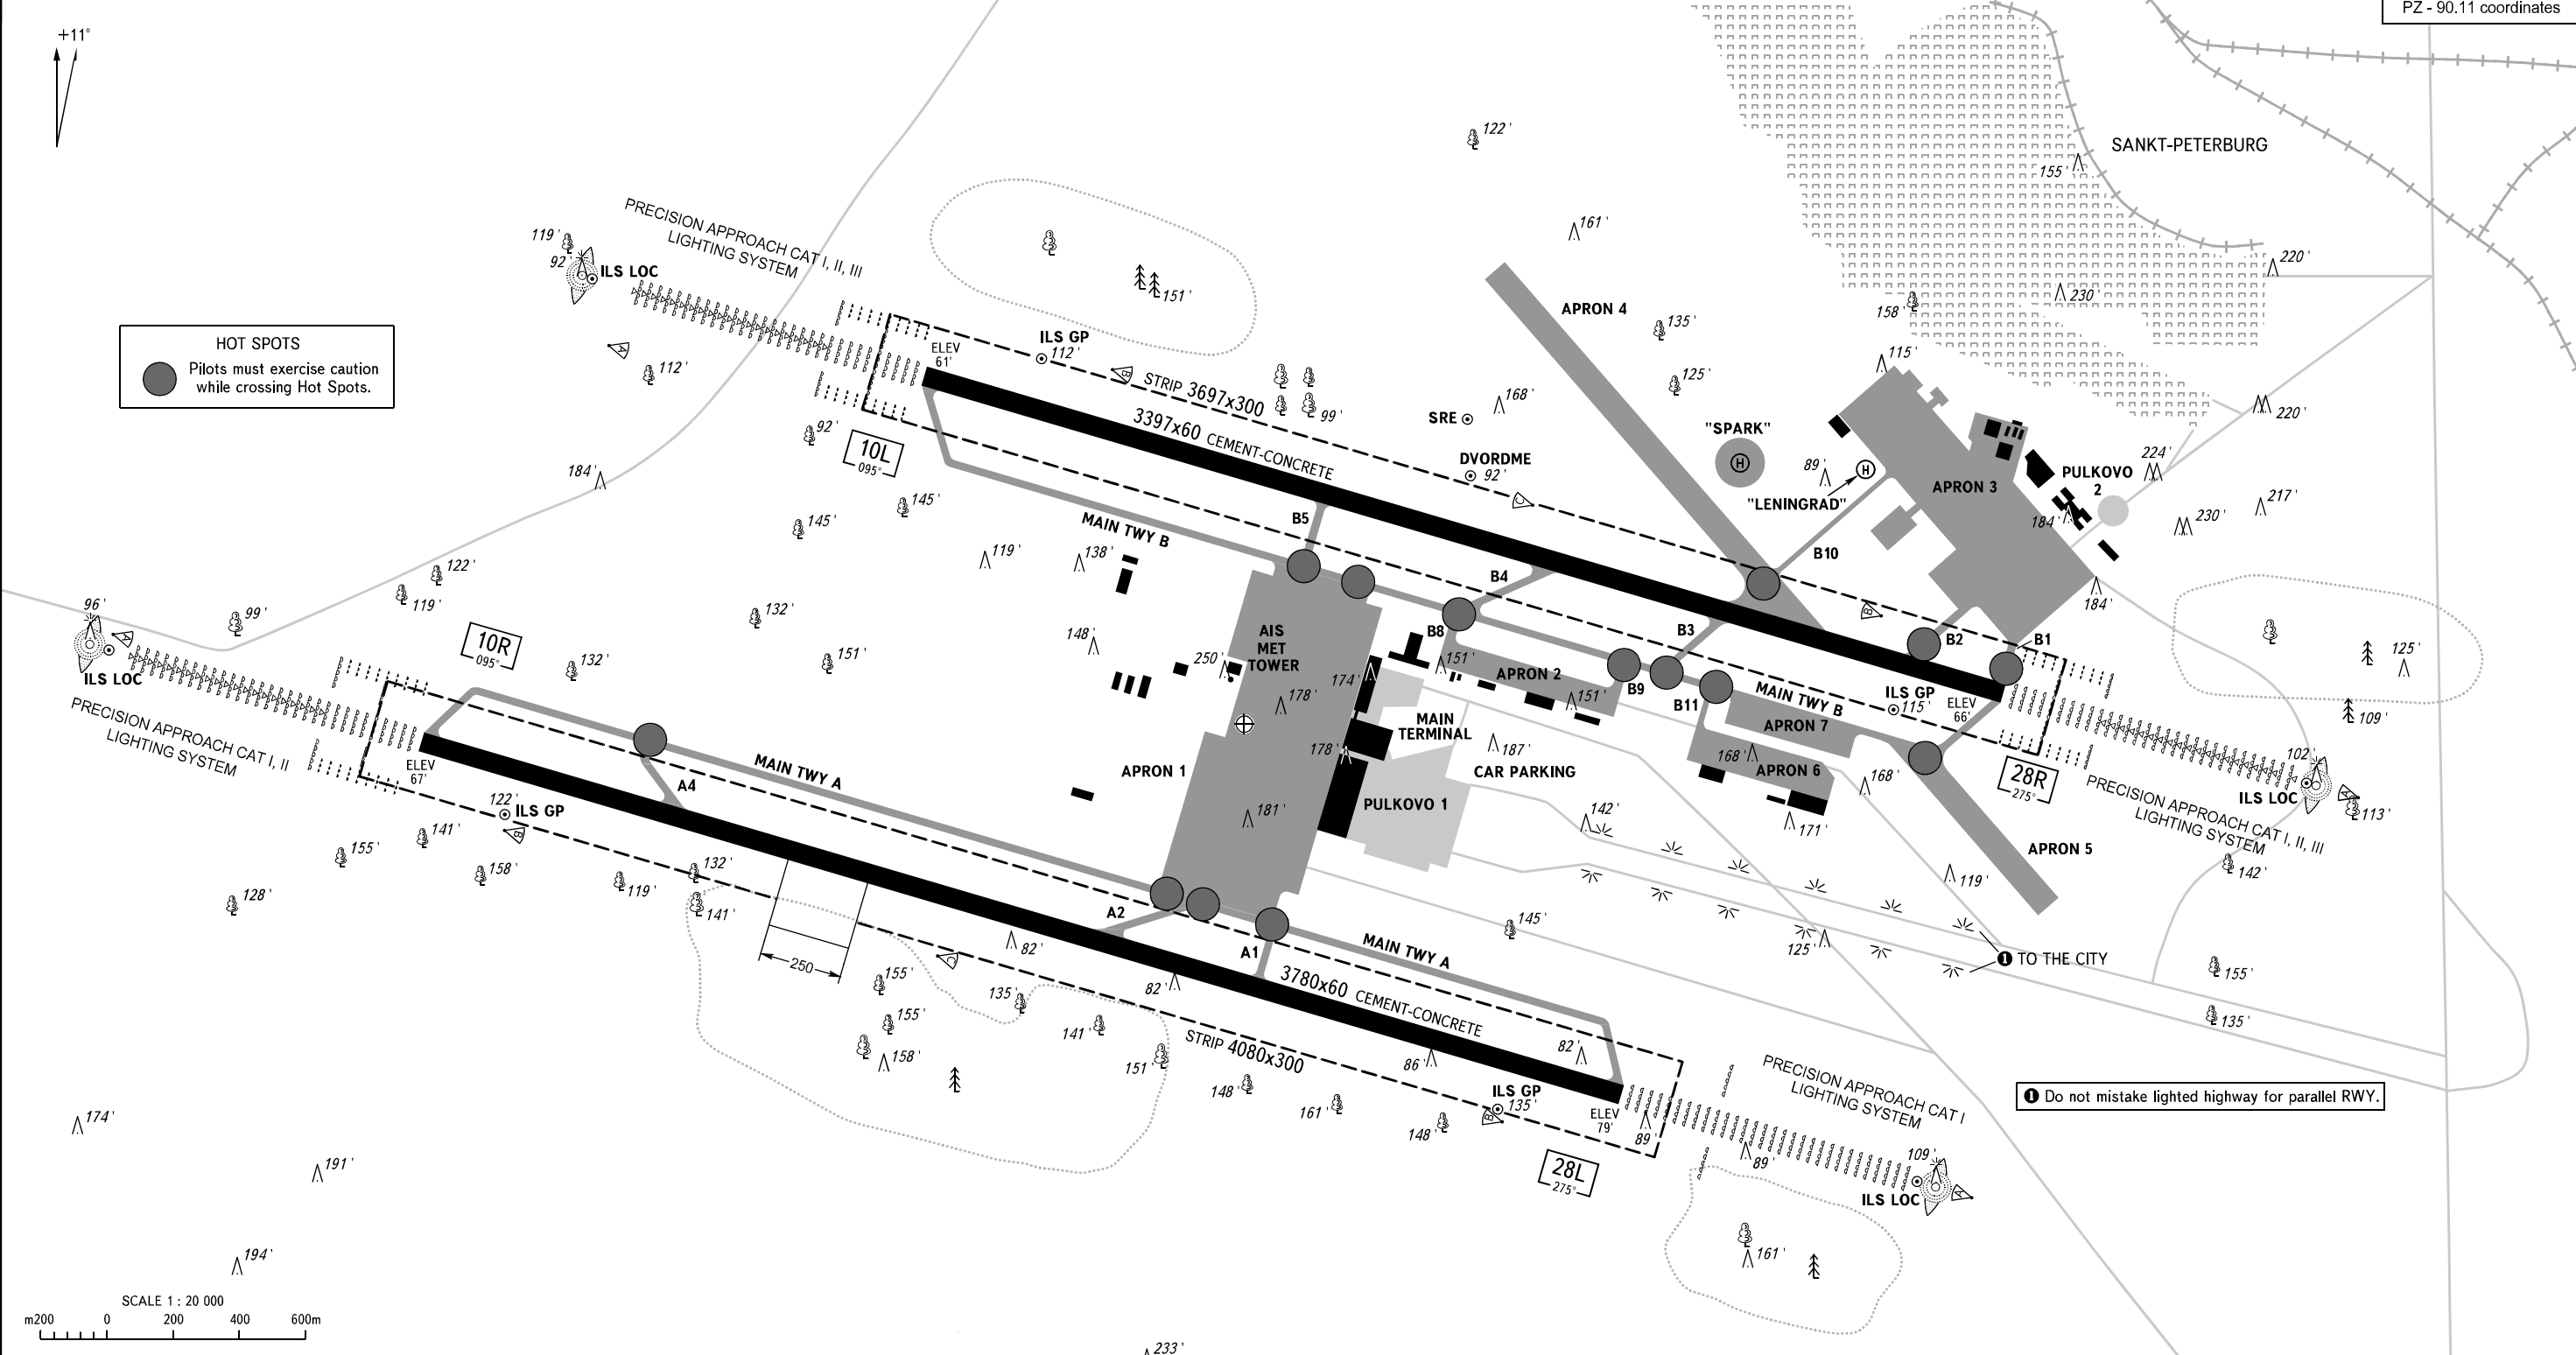

HOT SPOTS
Pilots must exercise caution while crossing Hot Spots.

Do not mistake lighted highway for parallel RWY.

RWY	DIRECTION (TRUE)	THR	BEARING STRENGTH
10L	106°27'	59°48'35"N 030°14'43"E	PCN 84 /R/C/W/T
28R	286°30'	59°48'04"N 030°18'12"E	
10R	106°24'	59°48'00"N 030°13'06"E	PCN 71 /R/B/W/T
28L	286°27'	59°47'25"N 030°16'59"E	


ELEVATIONS IN FEET
DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC

GENERAL
RWY 10L/28R is approved for CAT I, II, IIIA operations;
RWY 10R is approved for CAT I, II operations;
RWY 28L is approved for CAT I operations.


WARNING
Buildings, technical constructions, Control tower are located within RWY strip limits at a DIST of 132m to 150m north of RWY centre line at RWY 10L THR.

CHANGE: HOT SPOTS


MARKING AIDS RWY 10L / 28R AND EXIT TWY

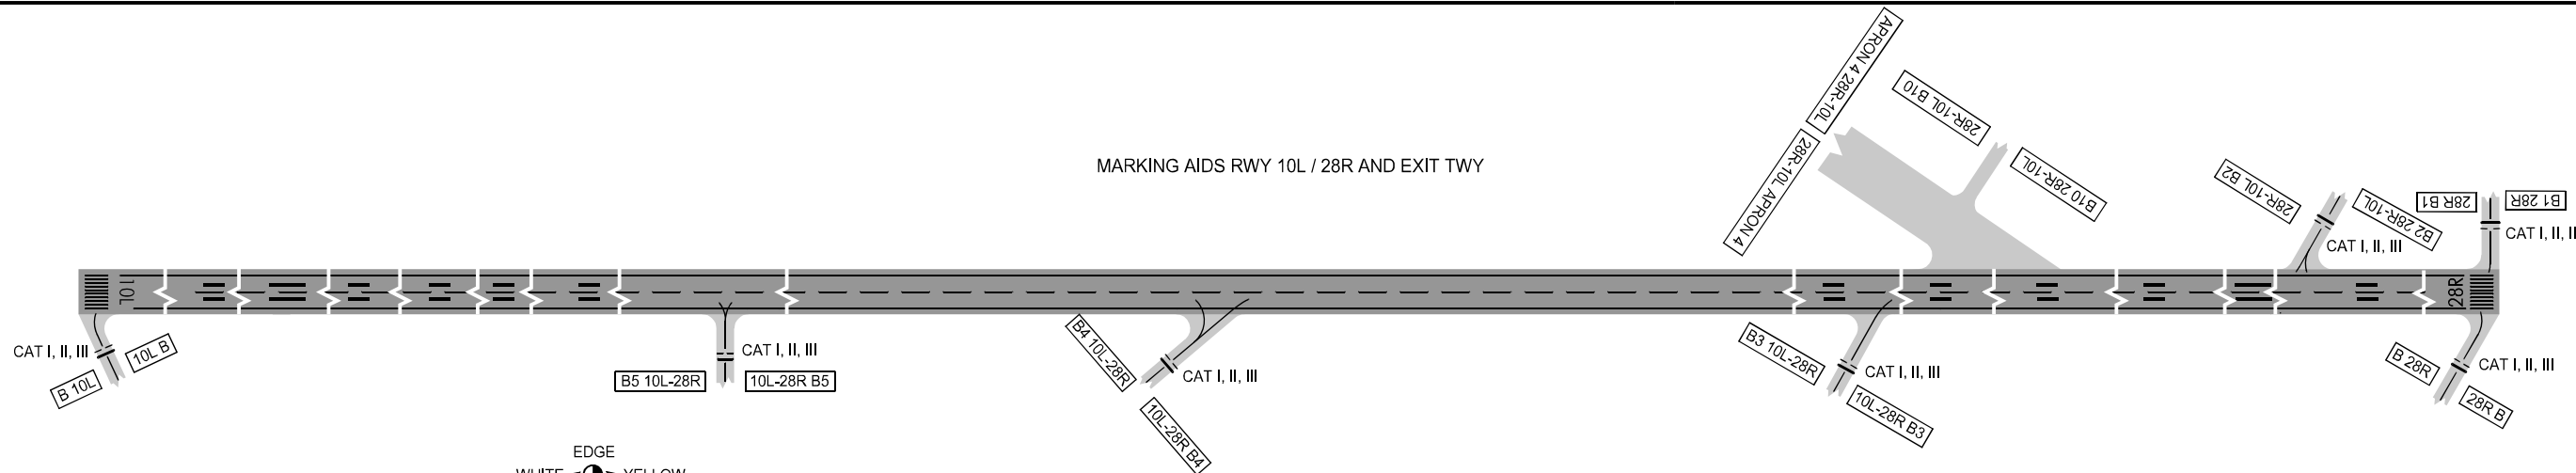


LIGHTING AIDS RWY 10L / 28R AND EXIT TWY

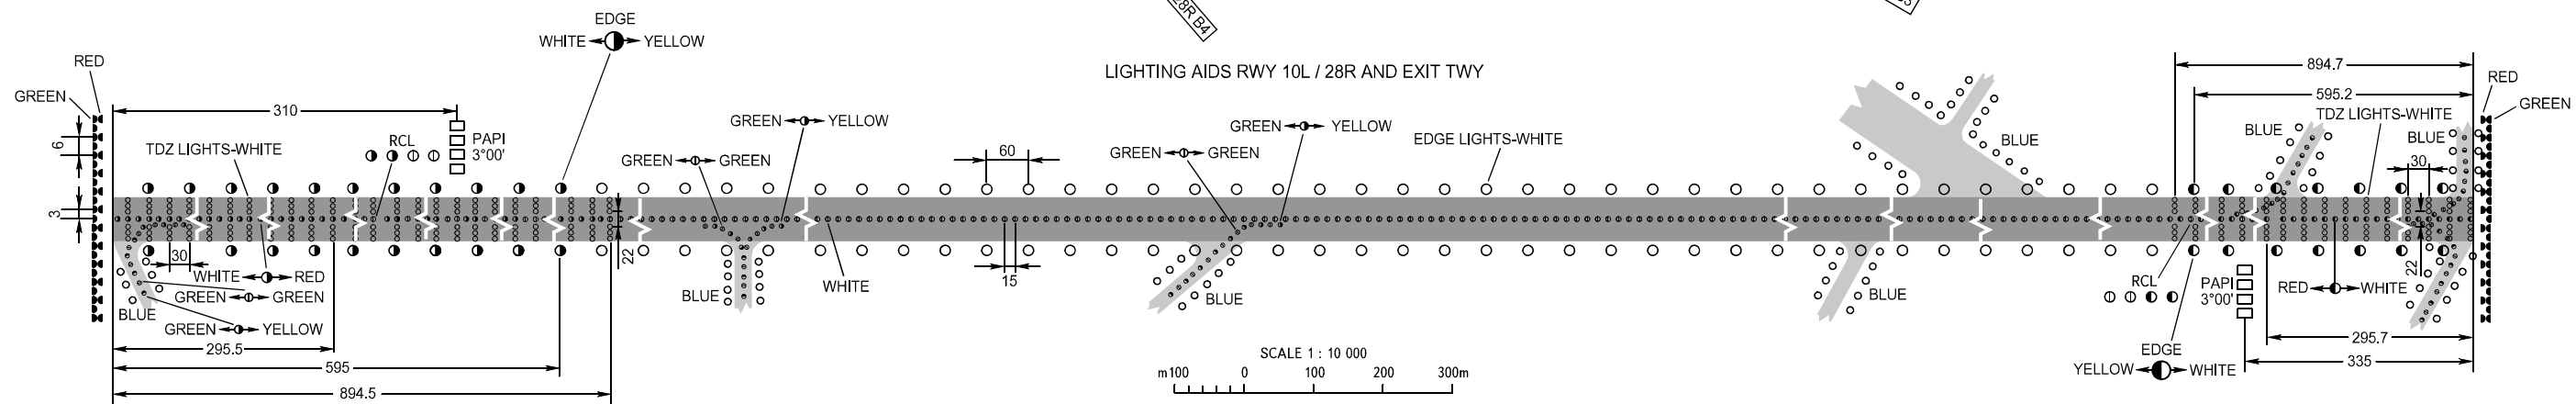

MARKING AIDS RWY 10R / 28L AND EXIT TWY

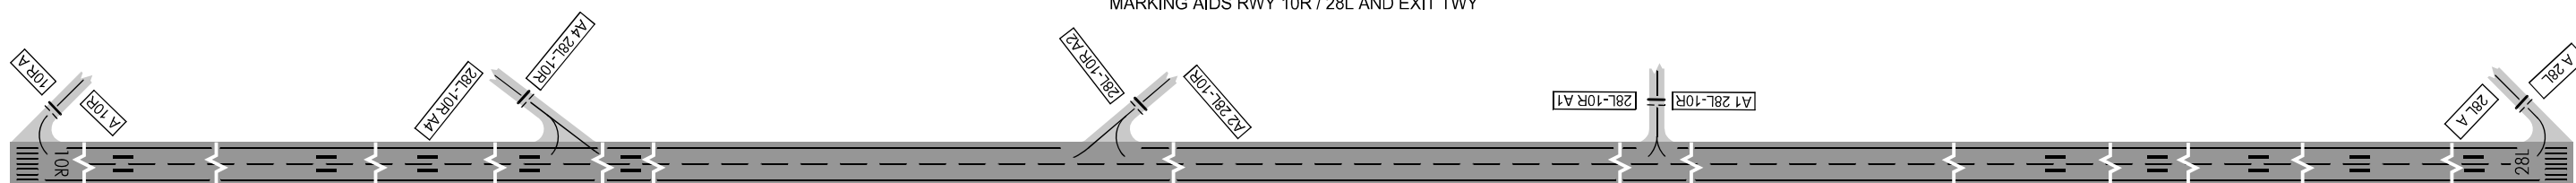

LIGHTING AIDS RWY 10R / 28L AND EXIT TWY

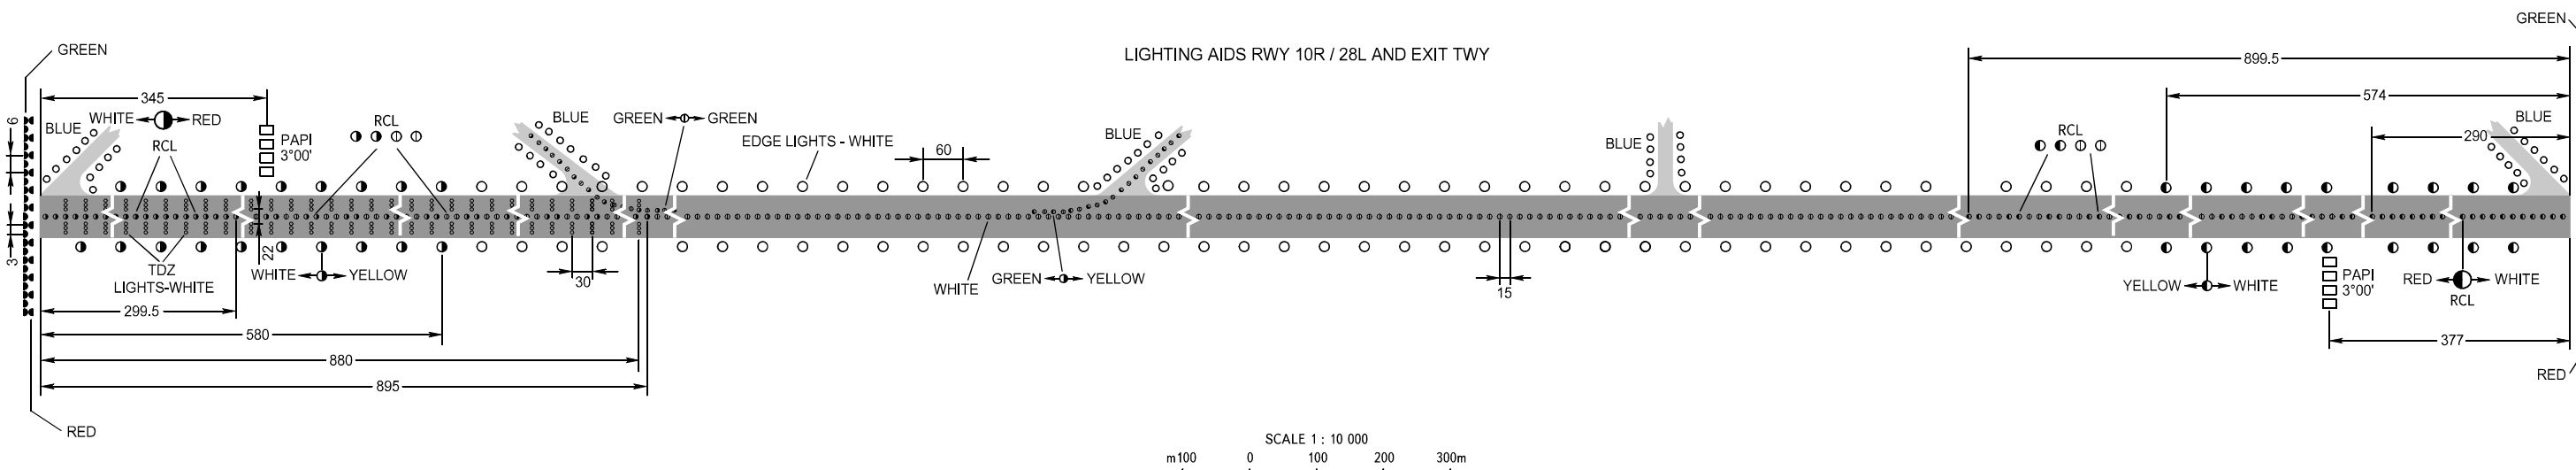

DIMENSIONS IN METRES

CHANGE: NIL