
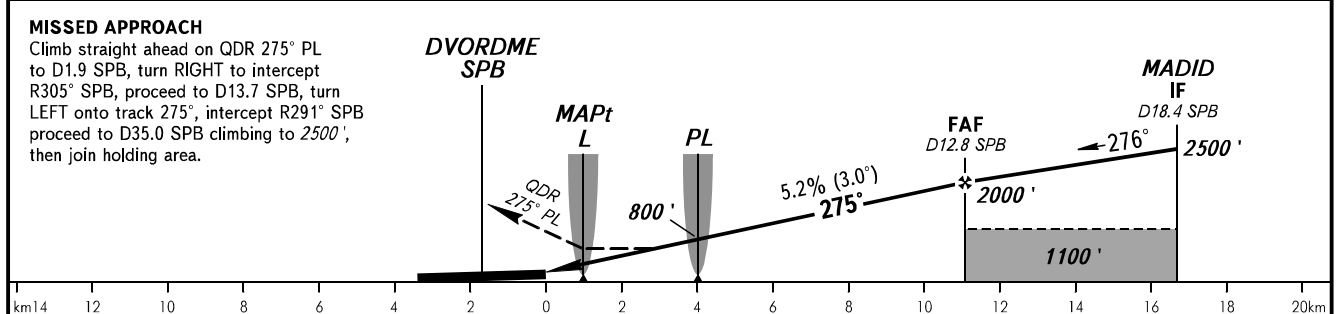


**INSTRUMENT
APPROACH
CHART - ICAO**

RADAR **120.300**
TOWER **118.100**

**SANKT-PETERBURG, RUSSIA
PULKOVO
NDB RWY 28R**

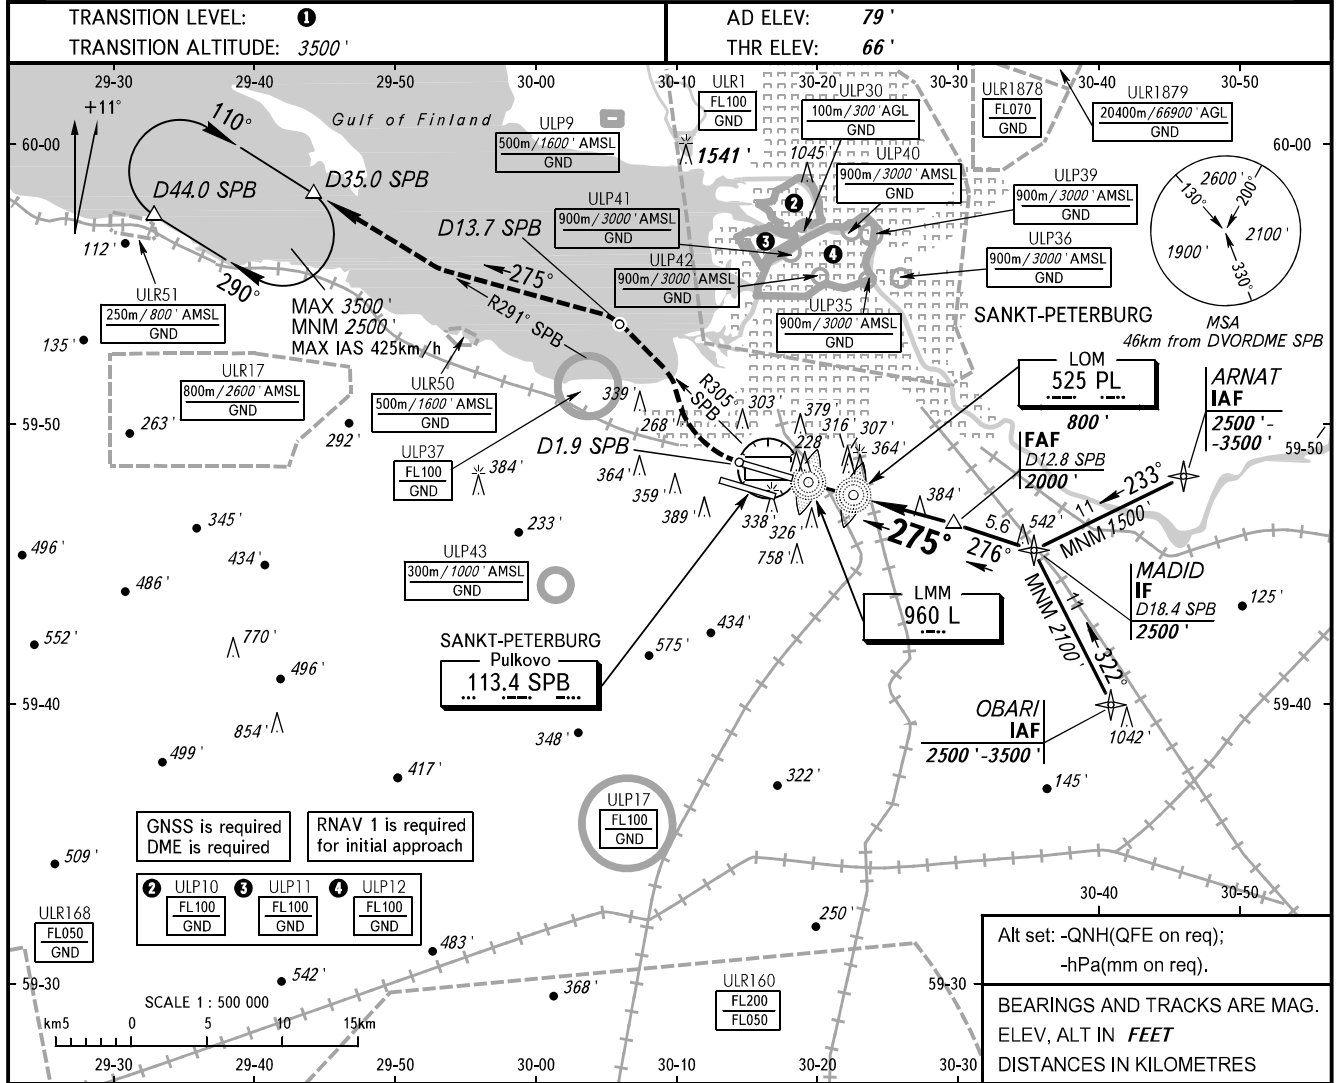

OCA(H)		A	B	C	D	1. TRANSITION LEVEL:										
Straight-in	NDB (LOM)	550' (480')	550' (480')	550' (480')	550' (480')	- FL050 when QNH is 995.9 hPa (747mm mercury column) or above;										
						- FL060 when QNH is 959.9 hPa (720mm mercury column) or above, but less than 995.9 hPa (747mm mercury column);										
Circling		690' (610')	790' (710')	900' (820')	1040' (960')	- FL070 when QNH is less than 959.9 hPa (720mm mercury column).										
GROUND SPEED		km/h	150	180	210	240	270	300	330	360	390	420	450			
RATE OF DESCENT		m/s	2.2	2.6	3.0	3.5	3.9	4.3	4.8	5.2	5.6	6.1	6.5			
		ft/min	430	516	602	688	774	860	946	1032	1118	1204	1290			

NOTE:
1. The length of intermediate approach is less than 9.3km.
2. MAPt at LMM L. Timing not authorized for defining MAPt.
3. Level flight segment is not AVBL before FAF.