


AERODROME GROUND
MOVEMENT CHART - ICAO

TOWER 120.300

MURMANSK, RUSSIA

MURMANSK

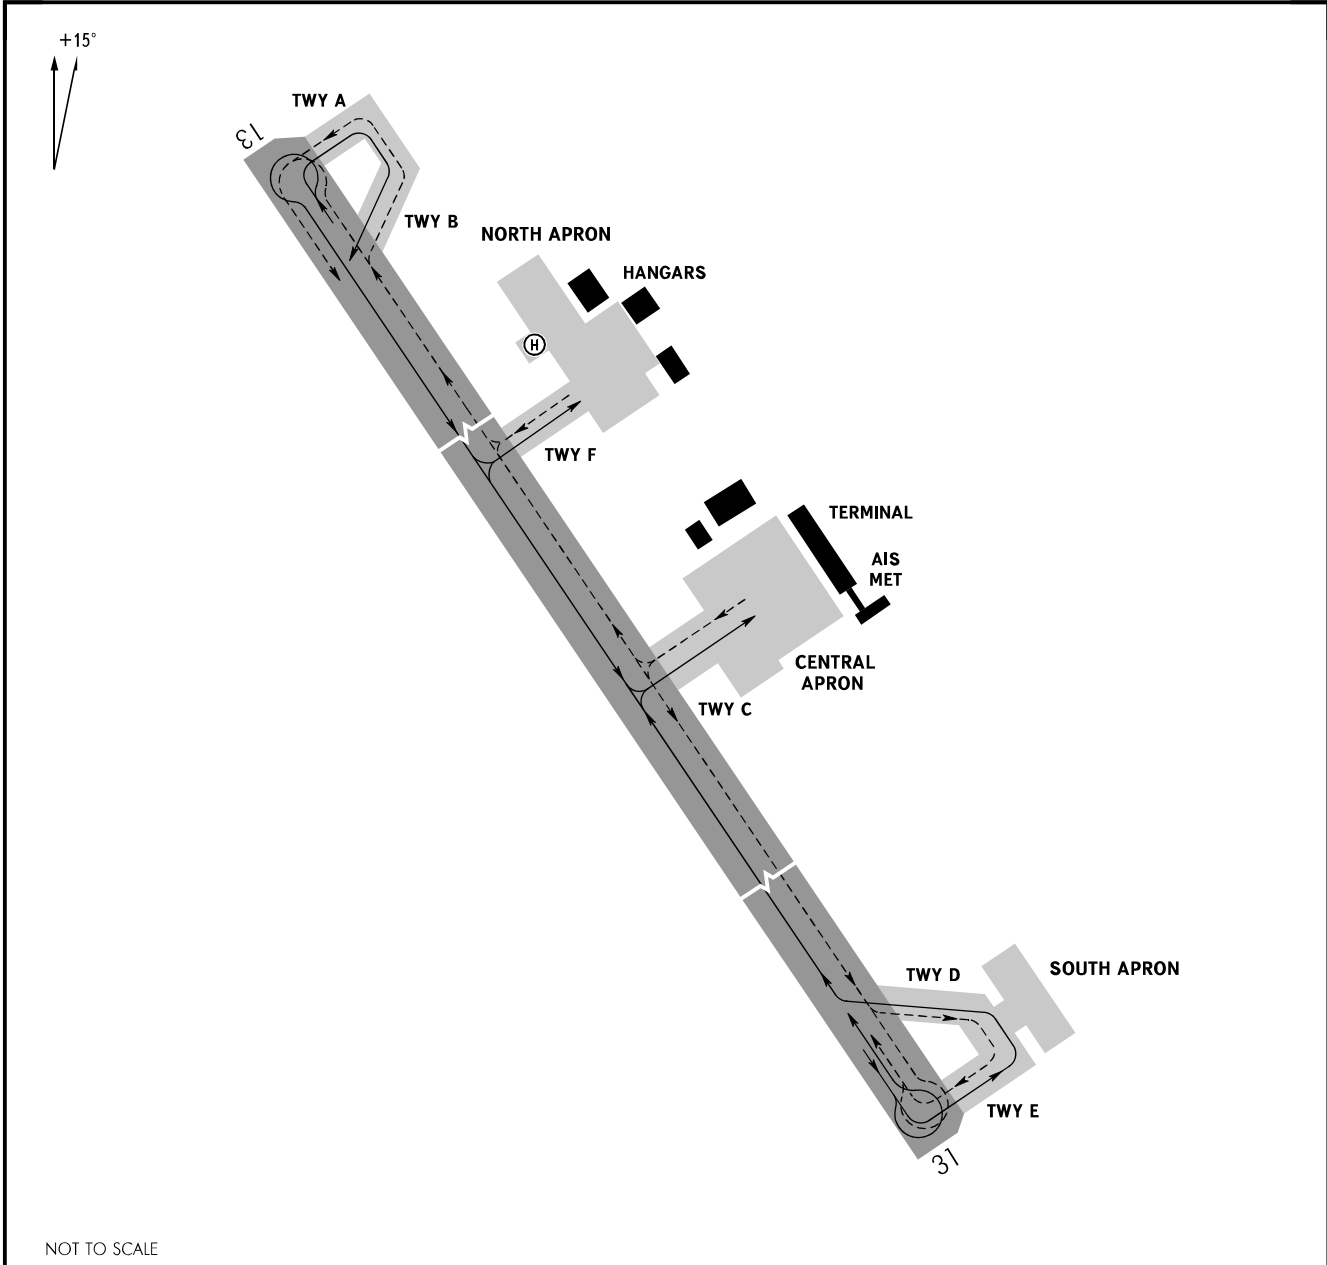

NOT TO SCALE

CENTRAL APRON:

Surface: - Asphalt-Concrete

NORTH APRON:

Surface: - Asphalt-Concrete

TAXIWAYS:

Width:	A, B, D, E	- 21.0m
	C	- 23.0m
	F	- 7.0m
Surface:	A, B, C, D, E, F	- Asphalt-Concrete
Strength:	A, B	- PCN 41/R/B/X/T
	C	- PCN 45/R/B/X/T
	D, E	- PCN 37/R/B/X/T (mixed)
	F	- PCN 7/F/D/Y/T

WARNING:

1. All ACFT types are allowed to execute a turn on RWY turn pads at junctions with TWY A and TWY E or, by the decision of a pilot-in-command, at any place of the runway with the permission of TWR controller.
2. Taxiing via TWY F under own engine power or main rotor power is prohibited. Towing shall be carried out in all cases.

CHANGE: NIL