
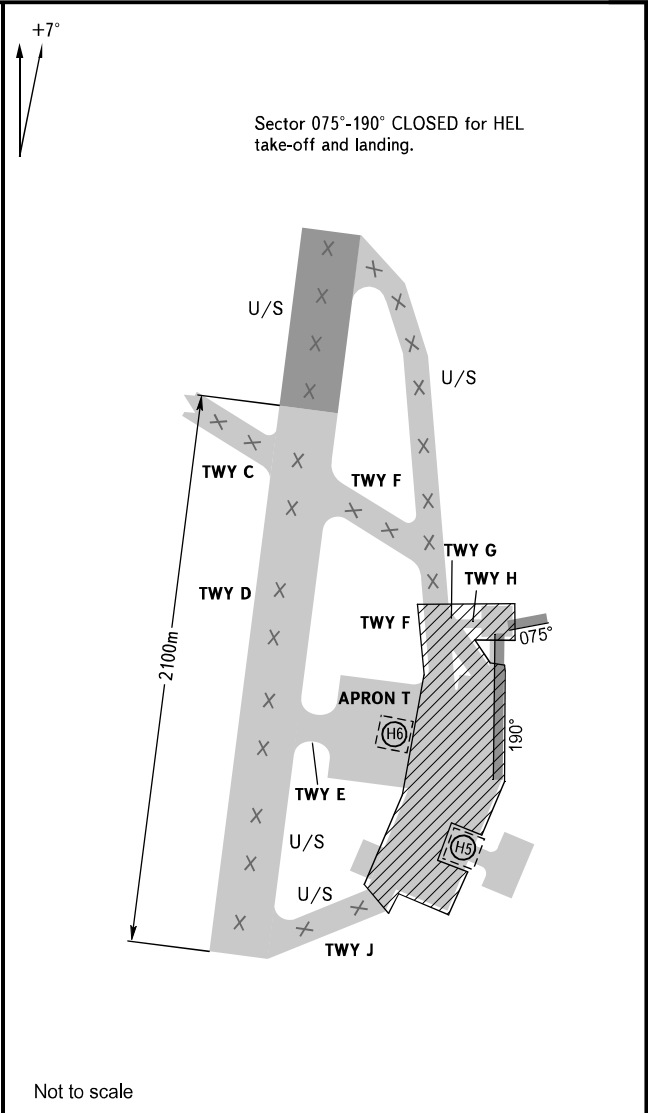


AERODROME GROUND
MOVEMENT CHART - ICAO

GROUND	119.000
TOWER	120.800

SIMFEROPOL, RUSSIA

SIMFEROPOL

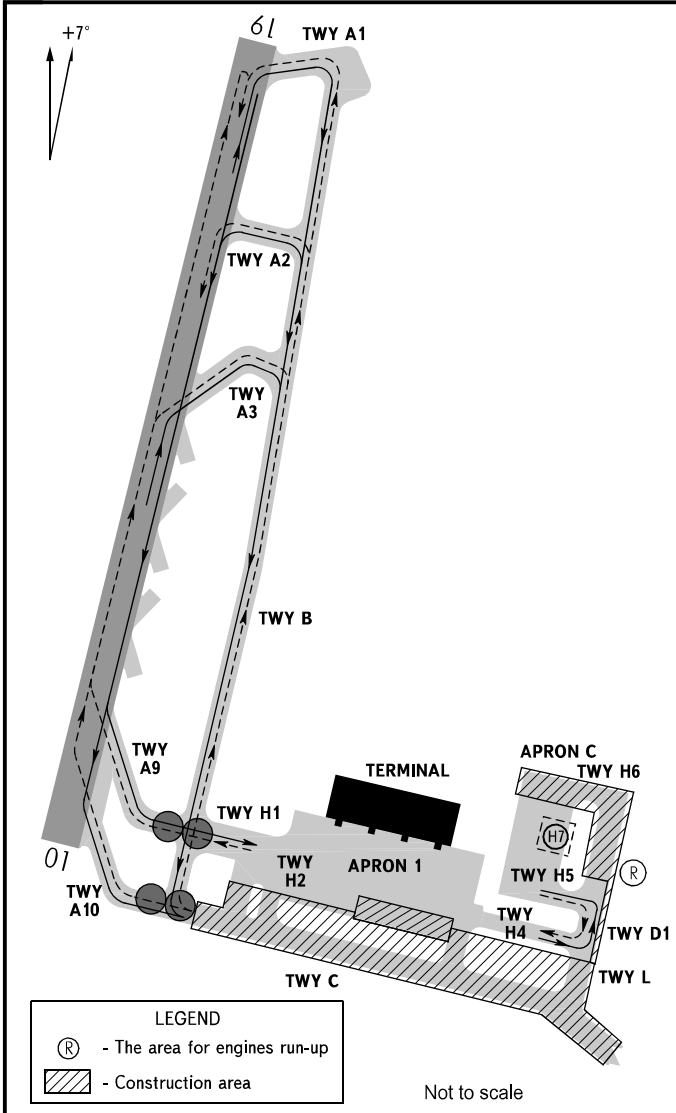

TAXIWAYS:

Width:	A1, A2, A3, A10, B, C, D1, E, H5, H6, L	- 22.5m
	D	- 45.0m
	F	- 21.8m
	G	- 21.0m
	H	- 10.5m
	H1	- 50.0m
	A9, H2, H3, H4	- 23.0m
	J	- 17.5m

Surface:	A1, A2, A3, B, C, D1, L	- Reinforced Concrete
	D, E, F, G, J	- Asphalt-Concrete
	A9, A10, H, H1, H2, H3, H4, H5, H6	- Cement-Concrete

Strength:	A1, A2, A3, B, C, D1, L	- PCN 53/R/B/W/T
	A10, H5, H6	- PCN 57/R/B/W/T
	A9, H1, H2, H3, H4	- PCN 64/R/A/W/T
	D	- PCN 31/R/B/X/T (mixed)
	D (from TWY C to TWY E)	- PCN 31/R/B/X/T (mixed)
	D (from TWY E to TWY J)	- PCN 22/R/B/X/T (mixed)
	E, J	- PCN 20/R/B/X/T (mixed)
	F	- PCN 39/R/B/X/T (mixed)
	G	- PCN 32/F/C/X/T
	H	- PCN 20/F/C/X/T

WARNING:

1. TWY A2, TWY D segment from TWY E to TWY J are used only in the day-time ("FOLLOW ME" vehicle is used in the night-time).
2. During taxiing via TWY A1, TWY A2, TWY A3, TWY B maintain communication with TOWER controller on frequency 120.800.
3. Taxiing via TWY G and aprons shall be carried out under inboard engines power.

CHANGE: H7