


**AERODROME GROUND
MOVEMENT CHART - ICAO**

START	120.300
GROUND	121.700

KAZAN, RUSSIA

KAZAN

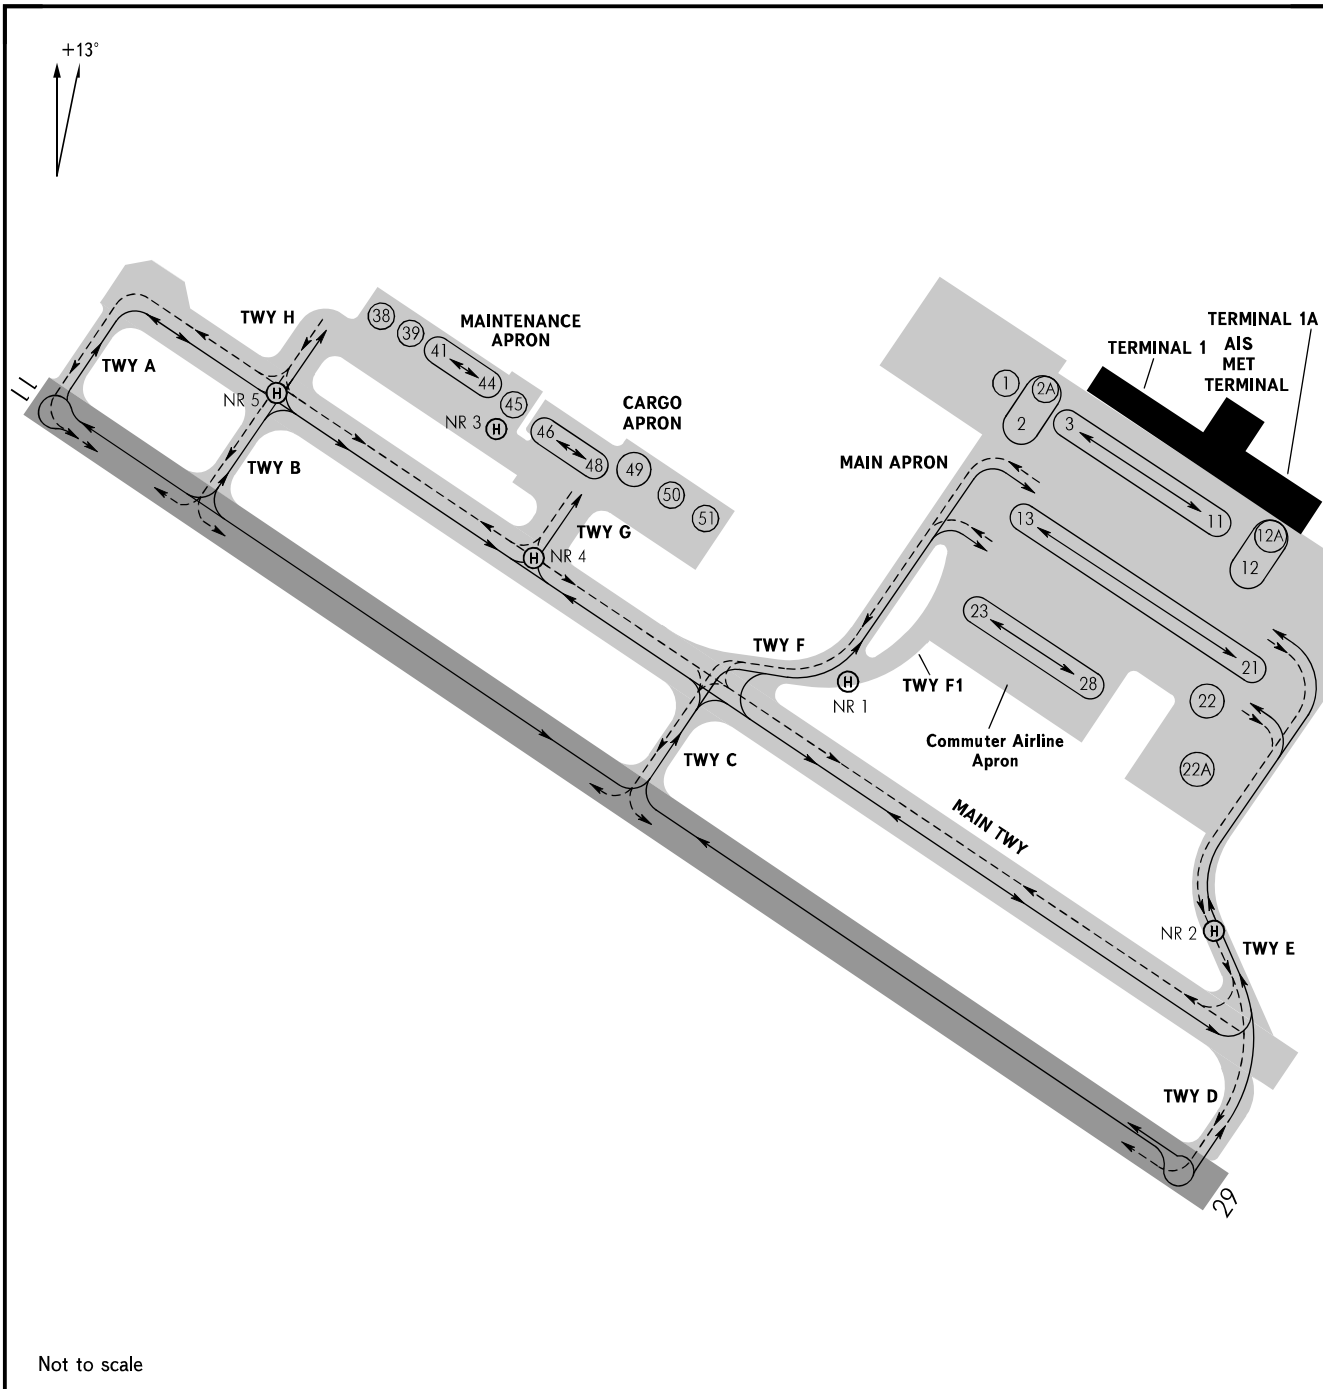

Not to scale

APRONS:

MAIN apron:

Surface: Cement-Concrete
Strength: PCN 58/R/A/W/T

CARGO APRON:

Surface: Cement-Concrete
Strength: PCN 44/R/B/W/T

MAINTENANCE APRON:

Surface: Reinforced Concrete
Strength: PCN 44/R/B/W/T

TAXIWAYS:

Width: MAIN - 45m
A, B, C, D, E, F, F1 - 23m
G - 46m
H - 44m

Surface: MAIN, A, B, C, D, E, F, F1, G, H - Cement-Concrete
Strength: MAIN, A, B, C, E, G, H - PCN 44/R/A/W/T
F, F1 - PCN 41/R/A/W/T
D - PCN 44/R/B/W/T

WARNING

See page AD 2.1 UWKD-11.

- Ⓜ NR 1 Diameter 18.0m; 55 36 21N 049 17 25E; ELEV 407' Cement-Concrete, PCN 41/R/A/W/T.
- Ⓜ NR 2 Diameter 18.0m; 55 36 10N 049 17 56E; ELEV 414' Cement-Concrete, PCN 44/R/A/W/T.
- Ⓜ NR 3 Diameter 18.0m; 55 36 39N 049 16 43E; ELEV 395' Cement-Concrete, PCN 41/R/A/W/T.
- Ⓜ NR 4 Diameter 18.0m; 55 36 30N 049 16 48E; ELEV 384' Cement-Concrete, PCN 44/R/A/W/T.
- Ⓜ NR 5 Diameter 18.0m; 55 36 45N 049 16 10E; ELEV 361' Cement-Concrete, PCN 44/R/A/W/T.

CHANGE: New chart