
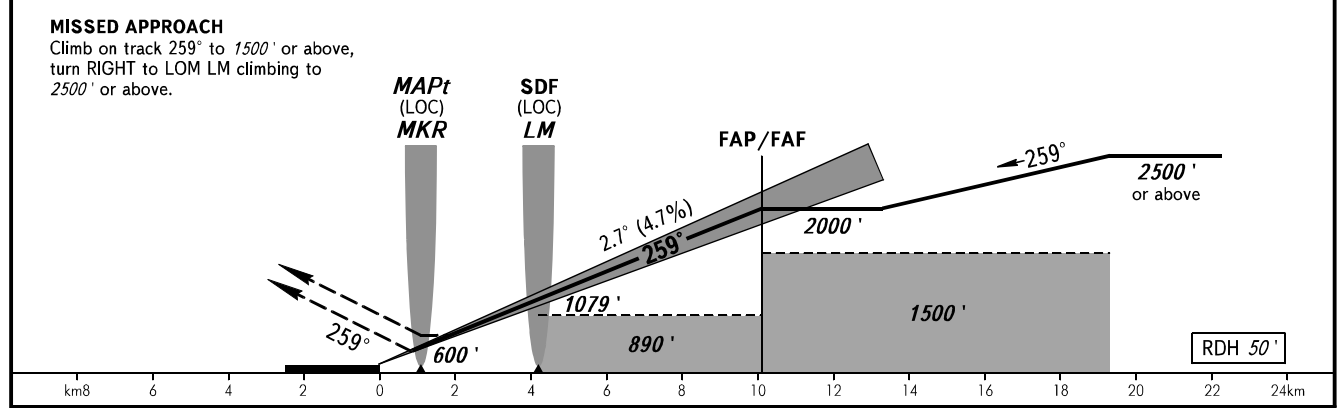


**INSTRUMENT
APPROACH
CHART - ICAO**

TOWER	128.000
RADAR	120.400

ORENBURG, RUSSIA
ORENBURG
ILS Y CAT I, LOC Y RWY 26

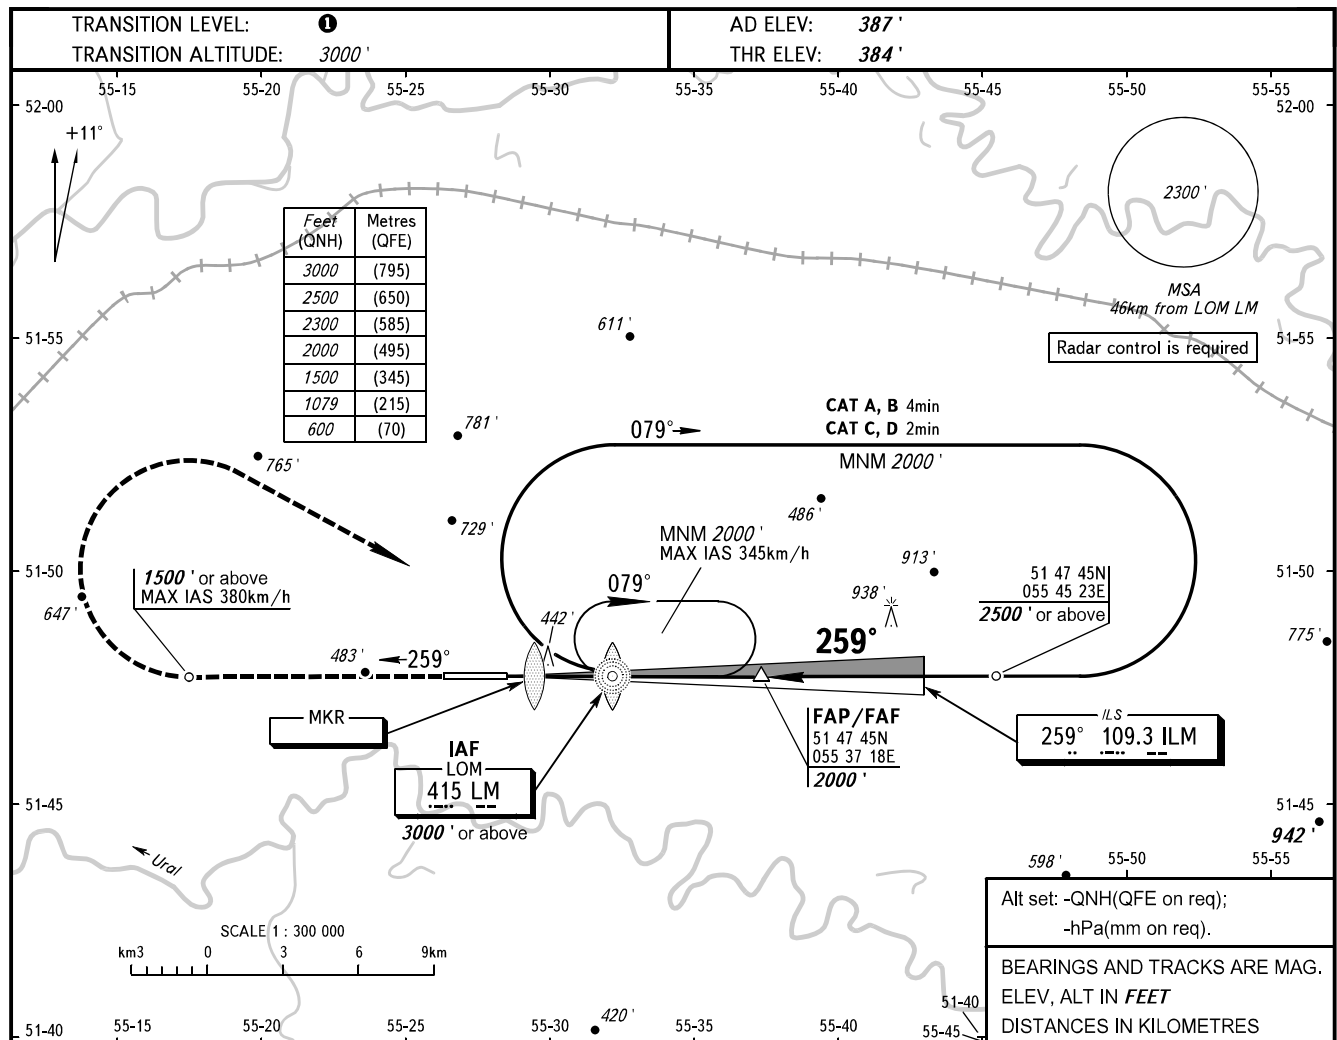

OCA(H)		A	B	C	D
Straight-in	CAT I	522' (138')	530' (146')	540' (156')	549' (165')
	LOC	690' (310')	690' (310')	690' (310')	690' (310')
Approach					
Circling		840' (460')	970' (590')	1130' (740')	1180' (790')

① TRANSITION LEVEL:
 - FL040 when QNH is 1013 hPa (760mm mercury column) or above;
 - FL050 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column);
 - FL060 when QNH is less than 977 hPa (733mm mercury column).
NOTE:
 1. Timing not authorized for defining MAPt.
 2. Turn before passing MAPt is PROHIBITED.

GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390
RATE OF DESCENT	m/s	2.0	2.4	2.7	3.1	3.5	3.9	4.3	4.7	5.1
	ft/min	385	463	540	617	694	771	848	925	1002