



INSTRUMENT
APPROACH
CHART - ICAO


TOWER 127.200

BLAGOVESHCHENSK, RUSSIA
IGNATYEVO
NDB Y RWY 36

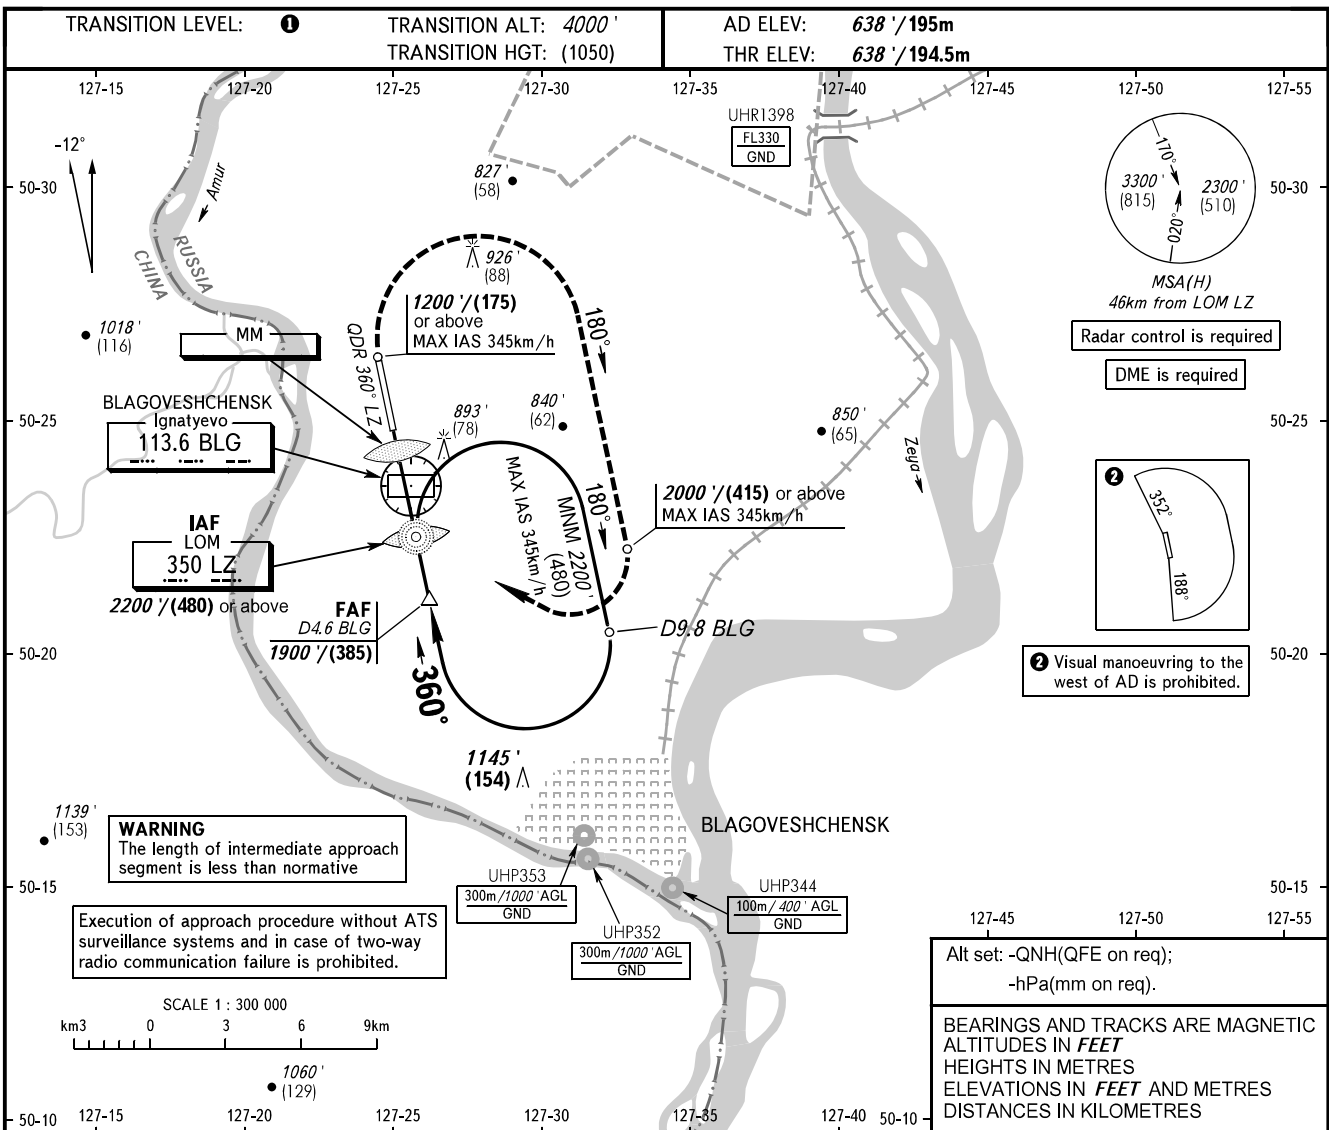


Radar control is required

DME is required



WARNING
The length of intermediate approach segment is less than normative

Execution of approach procedure without ATS surveillance systems and in case of two-way radio communication failure is prohibited.

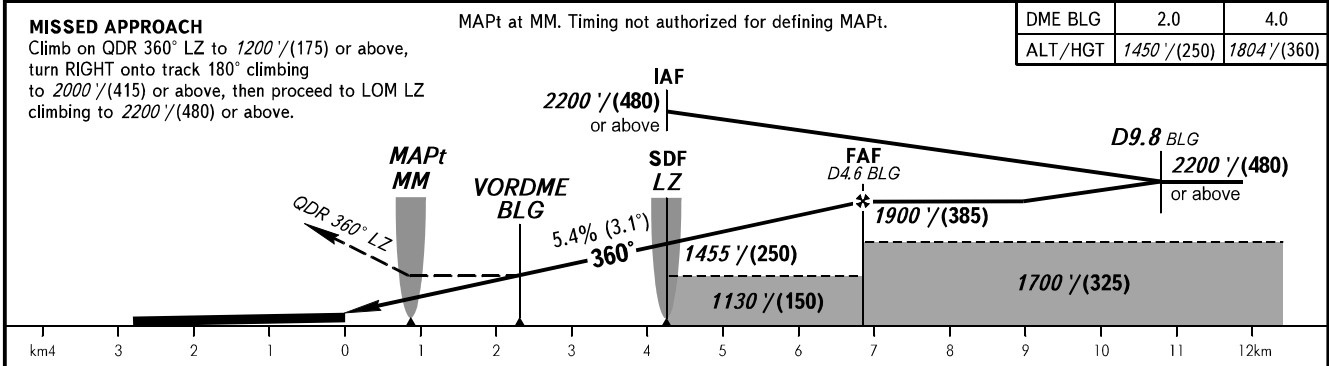

DME BLG	2.0	4.0
ALT/HGT	1450' / (250)	1804' / (360)

OCA(H)		A	B	C	D	① TRANSITION LEVEL: - FL050 when QNH is 1013 hPa (760mm mercury column) or above; - FL060 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column); - FL070 when QNH is less than 977 hPa (733mm mercury column). WARNING Turn before passing MAPt is PROHIBITED.				
Straight-in	Approach	1090' (460') (140)	1090' (460') (140)	1090' (460') (140)	1090' (460') (140)					
	Circling	1190' (550') (170)	1190' (550') (170)	1330' (690') (215)	1330' (690') (215)					
GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390
RATE OF DESCENT	m/s	2.3	2.7	3.2	3.6	4.1	4.5	5.0	5.4	5.9
RATE OF DESCENT	ft/min	443	531	620	709	797	886	974	1063	1152

CHANGE: Heading, HGT