



INSTRUMENT
APPROACH
CHART - ICAO

VLADIVOSTOK, RUSSIA
KNEVICHY
NDB Y RWY 25L

VLADIVOSTOK RADAR 123.400
VLADIVOSTOK TOWER 119.500

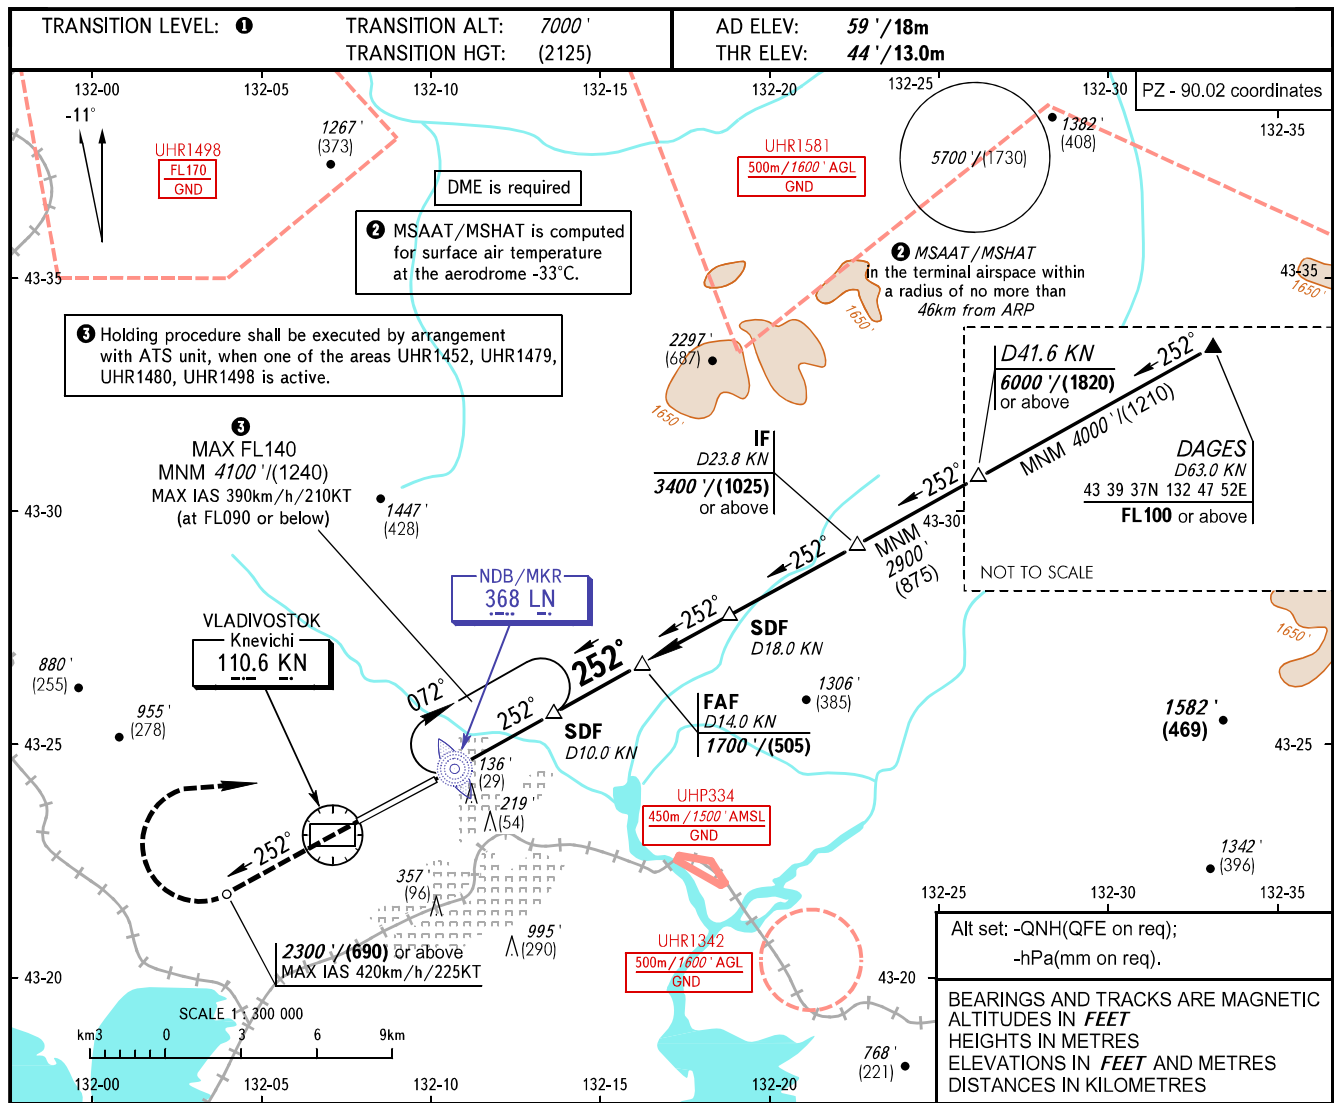

DME KN	8.0	10.0	12.0	14.0
ALTITUDE/HEIGHT	670'/(195)	1000'/(295)	1360'/(405)	1700'/(505)

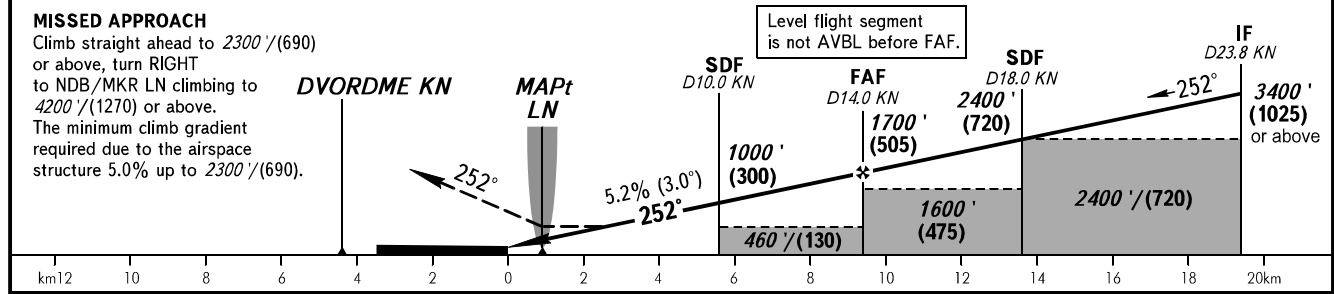

OCA(H)		A	B	C	D	TRANSITION LEVEL:						
Straight-in Approach	With SDF	390' (340') (105)	390' (340') (105)	390' (340') (105)	390' (340') (105)	- FL080 when QNH is 1013 hPa (760mm mercury column) or above; - FL090 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column); - FL100 when QNH is less than 977 hPa (733mm mercury column).						
	WO SDF	460' (420') (130)	460' (420') (130)	460' (420') (130)	460' (420') (130)	WARNING:						
Circling		520' (460') (145)	660' (600') (185)	1390' (1330') (410)	1510' (1460') (450)	1. MAPt at NDB/MKR LN. Timing not authorized for defining MAPt. 2. Turn before passing MAPt is PROHIBITED.						
GROUND SPEED		km/h	150	180	210	240	270	300	330	360	390	CHANGE: Holding area
RATE OF DESCENT		kt	81	97	113	130	146	162	178	194	211	
		m/s	2.2	2.6	3.0	3.5	3.9	4.3	4.8	5.2	5.6	
		ft/min	427	512	597	682	768	853	938	1024	1109	