

CHANGE: New chart


RWY	DIRECTION (TRUE)	THR	BEARING STRENGTH
05	053.56°	55°15'41"N 086°05'14"E	PCN 45 /R/A/W/T
23	233.60°	55°16'43"N 086°07'40"E	

ELEVATIONS AND DIMENSIONS IN METRES  
BEARINGS ARE MAGNETIC


**WARNING:**

1. RWY 05/23 SWYs are not provided.
2. RWY 05/23 PAPI are installed on the left.
3. The old RWY with magnetic track 047°/227° is not used for take-off/landing.
4. TWY 2 is closed for taxiing of all ACFT types.
5. There are RWY undulations at a distance of 500-1200m from RWY 23 THR towards RWY 05 THR. Shaking is possible during run, so flight crews should exercise increased caution.


MARKING AIDS RWY 05 / 23 AND EXIT TWY

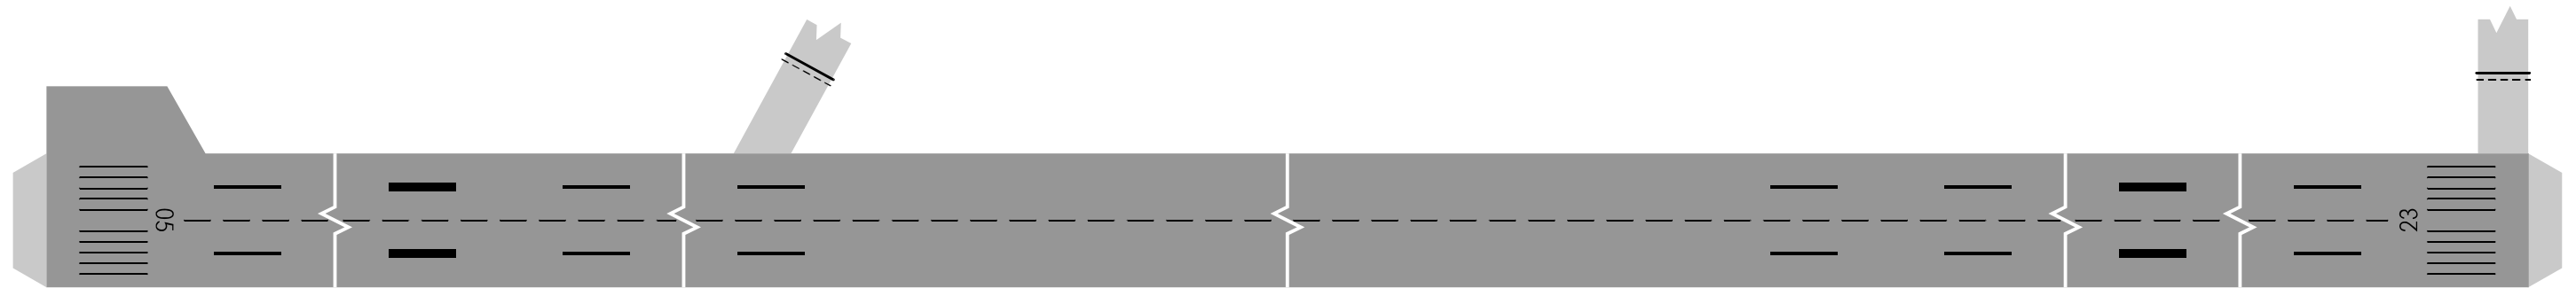

LIGHTING AIDS RWY 05 / 23 AND EXIT TWY

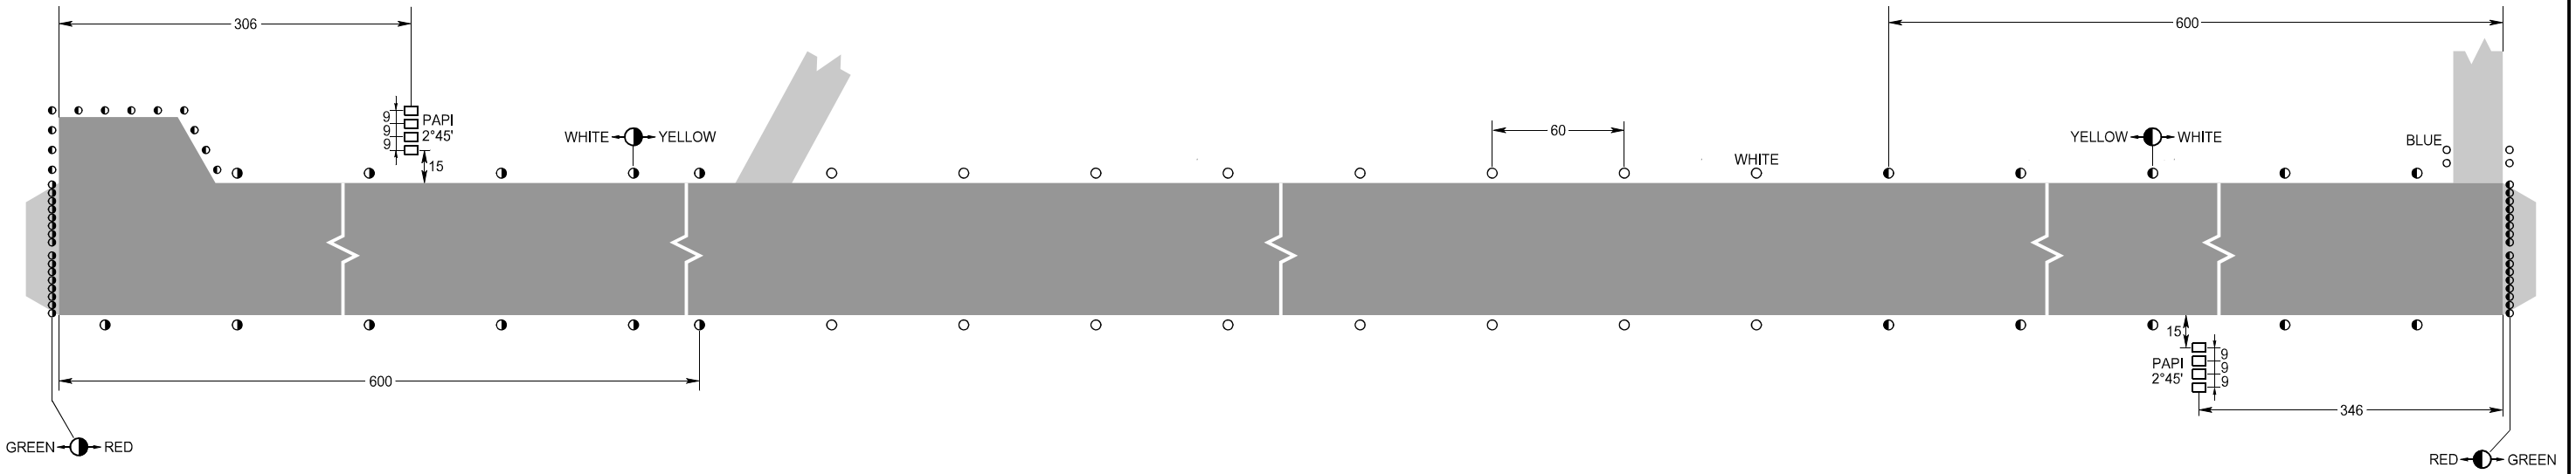

**WARNING:**  
 The height of RWY 05/23 edge, THR and end lights and TWY 1 edge lights exceeds the established norms (36cm). The actual height of RWY 05/23 lights:  
 Edge lights: 38cm, THR and end lights: 40cm, TWY 1 edge lights: 38cm.  
 Flight crews should exercise increased caution during taxiing.



ELEVATIONS AND  
 DIMENSIONS IN METRES  
 BEARINGS ARE MAGNETIC