
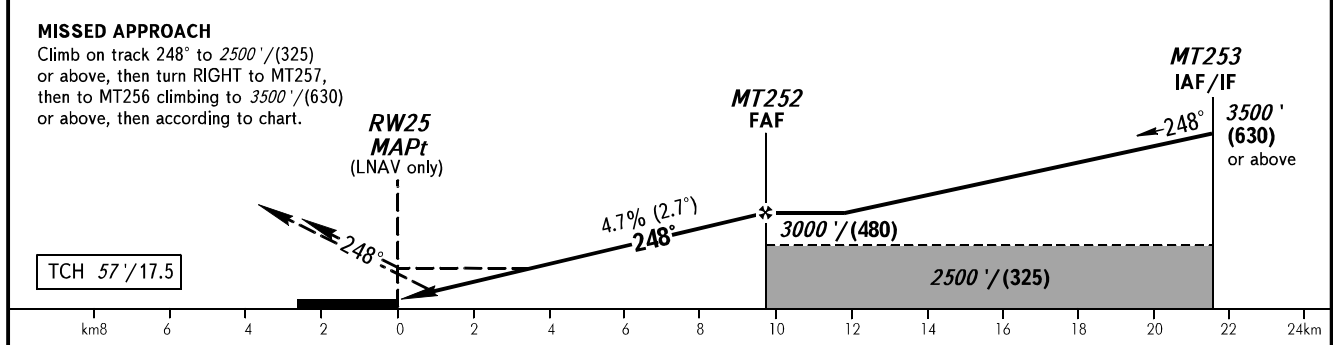


INSTRUMENT
APPROACH
CHART - ICAO

TOWER 120.900

STAVROPOL, RUSSIA
SHPAKOVSKOYE
RNAV RWY 25

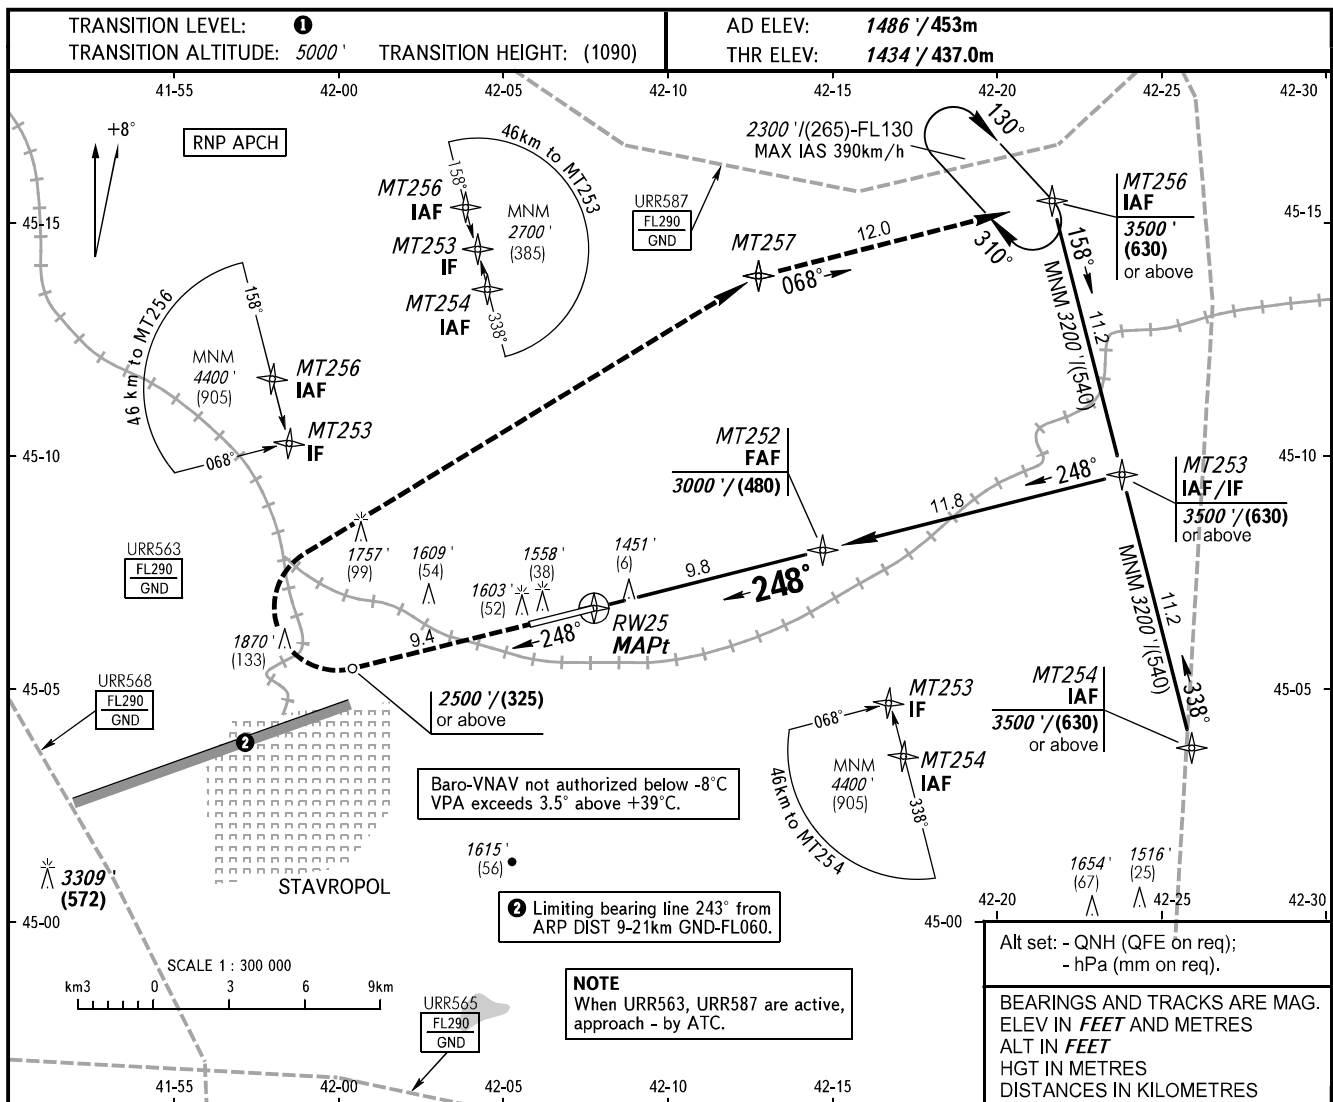

OCA(H)		A	B	C	D						
Straight-in Approach	LNAV	1765' (331') (100)	1765' (331') (100)	1765' (331') (100)	1765' (331') (100)						
	LNAV/VNAV	1641' (207') (65)	1653' (219') (70)	1672' (238') (75)	1698' (264') (80)						
Circling		1940' (450') (140)	1980' (500') (155)	2150' (670') (205)	2270' (780') (240)						
GROUND SPEED		km/h	150	180	210	240	270	300	330	360	390
RATE OF DESCENT		m/s	1.9	2.3	2.7	3.1	3.5	3.9	4.3	4.7	5.0
		ft/min	385	463	540	617	694	771	848	925	1002

1 TRANSITION LEVEL:
 - FL060 when QNH is 1013 hPa (760mm mercury column) or above;
 - FL070 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column);
 - FL080 when QNH is less than 977 hPa (733mm mercury column).

CHANGE: Heading, HGT