SABETTA, RUSSIA

SABETTA
RWY 22

STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT: ***4000 '/1200***

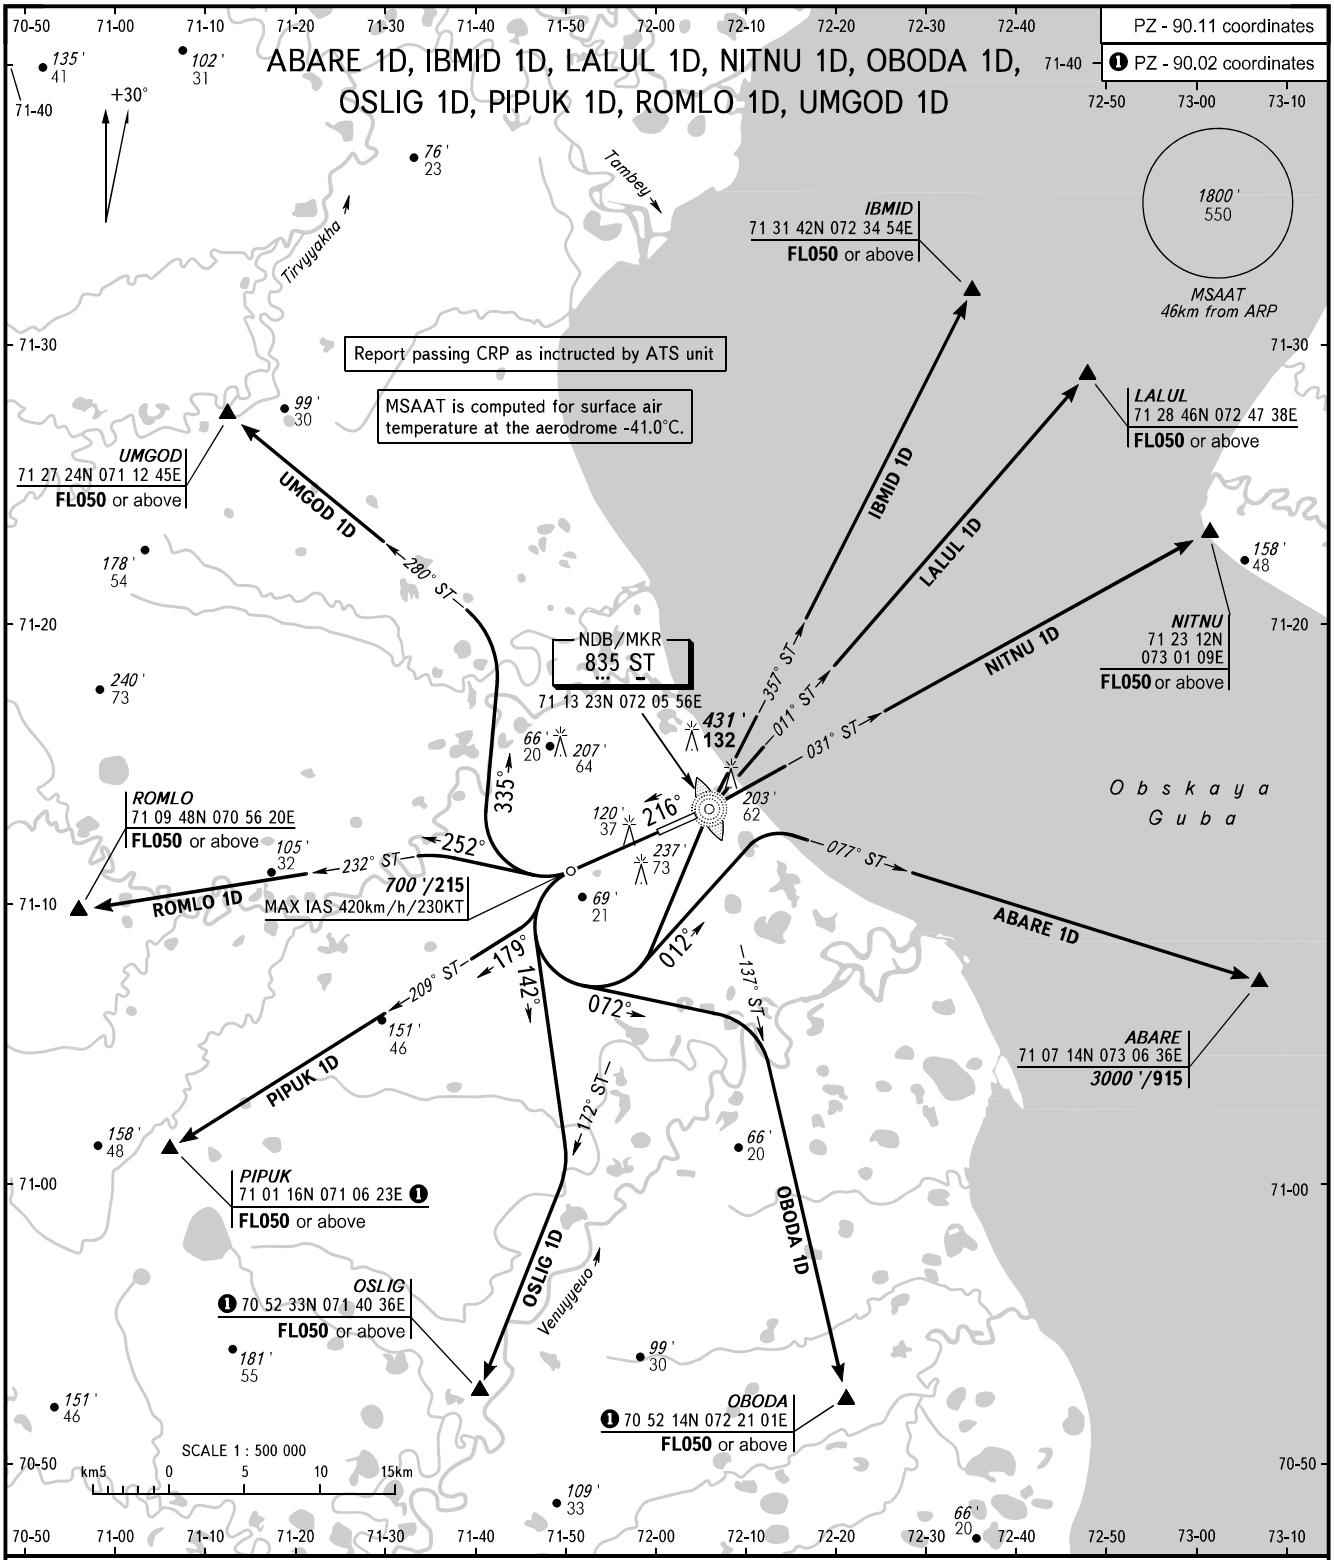

SABETTA INFORMATION **134.500**

WARNING
The minimum climb gradients required due to the airspace structure:
- 3.9% up to FL050 for ROMLO 1D;
- 3.5% up to FL050 for OSLIG 1D;
- 3.9% up to FL050 for PIPUK 1D.

BEARINGS AND TRACKS ARE MAGNETIC ALTITUDES IN ***FEET*** AND METRES ELEVATIONS IN ***FEET*** AND METRES DISTANCES IN KILOMETRES	Alt set: -QNH(QFE on req); -hPa(mm on req).

CHANGE: New chart