


**INSTRUMENT
APPROACH
CHART - ICAO**


**SAMARA, RUSSIA
KURUMOCH
GLS RWY 15**

RADAR	128.000
TOWER	118.200

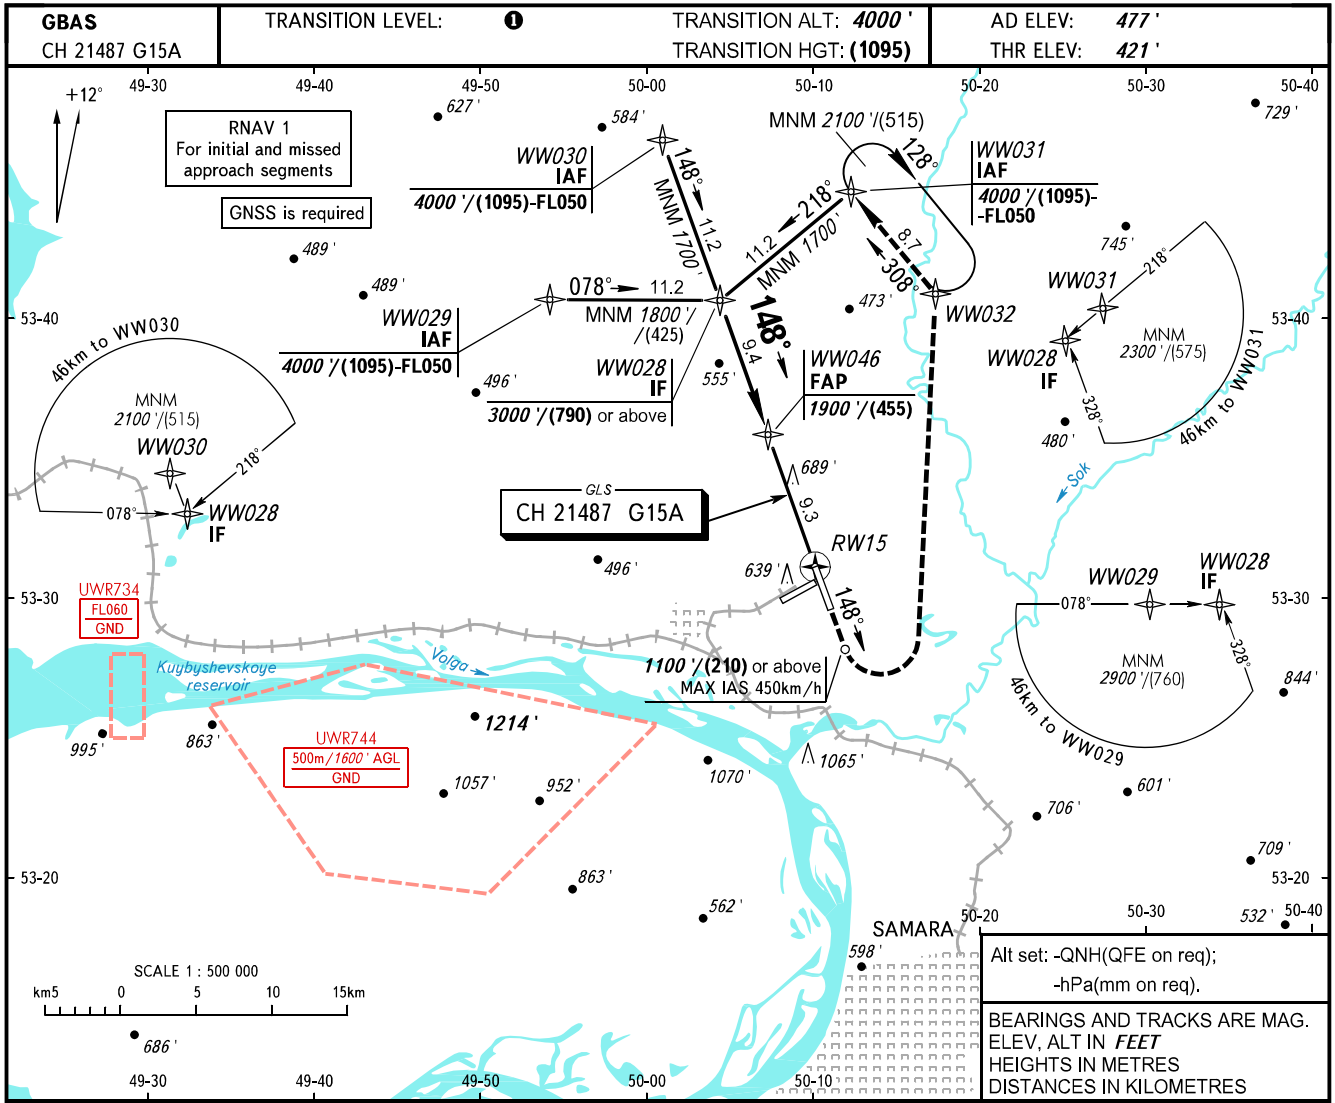

Alt set: -QNH(QFE on req);
-hPa(mm on req).

BEARINGS AND TRACKS ARE MAG.
ELEV, ALT IN FEET
HEIGHTS IN METRES
DISTANCES IN KILOMETRES

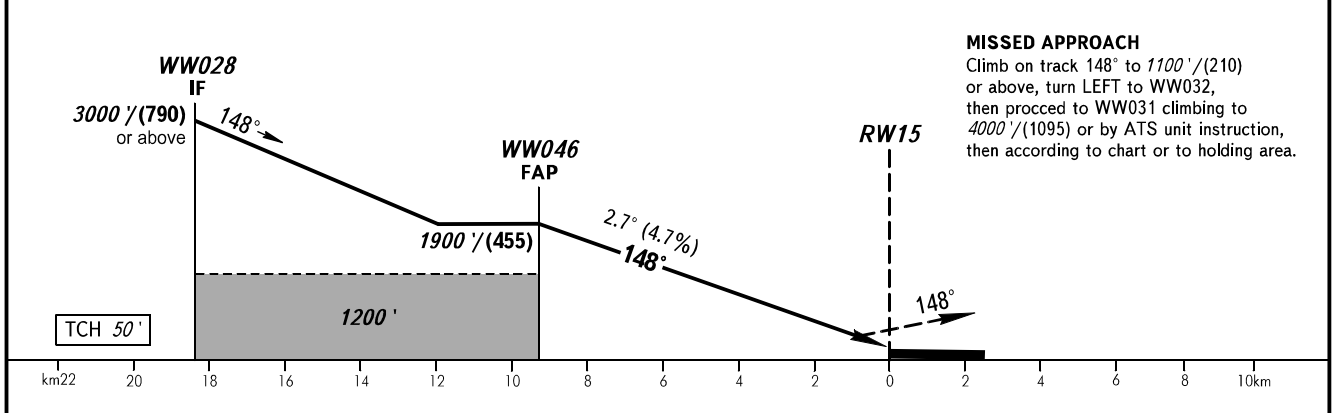

MISSED APPROACH
Climb on track 148° to 1100'/(210) or above, turn LEFT to WW032, then proceed to WW031 climbing to 4000'/(1095) or by ATS unit instruction, then according to chart or to holding area.

OCA(H)		A	B	C	D	DL
Straight-in Approach	CAT I	584' (163')	596' (175')	605' (184')	616' (195')	616' (195')
Circling		940' (460')	980' (500')	1090' (610')	1220' (740')	1220' (740')

① TRANSITION LEVEL:
- FL050 when QNH is 1013 hPa (760mm mercury column) or above;
- FL060 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column);
- FL070 when QNH is less than 977 hPa (733mm mercury column).

GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390
RATE OF DESCENT	m/s	2.0	2.4	2.7	3.1	3.5	3.9	4.3	4.7	5.1
RATE OF DESCENT	ft/min	385	463	540	617	694	771	848	925	1002

CHANGE: NIL