
AD 2.2 ULAM-39 14 JUL 22

AERODROME GROUND MOVEMENT AND AIRCRAFT PARKING/DOCKING CHART - ICAO VYSHKA 127,000

NARYAN-MAR, RUSSIA

NARYAN-MAR

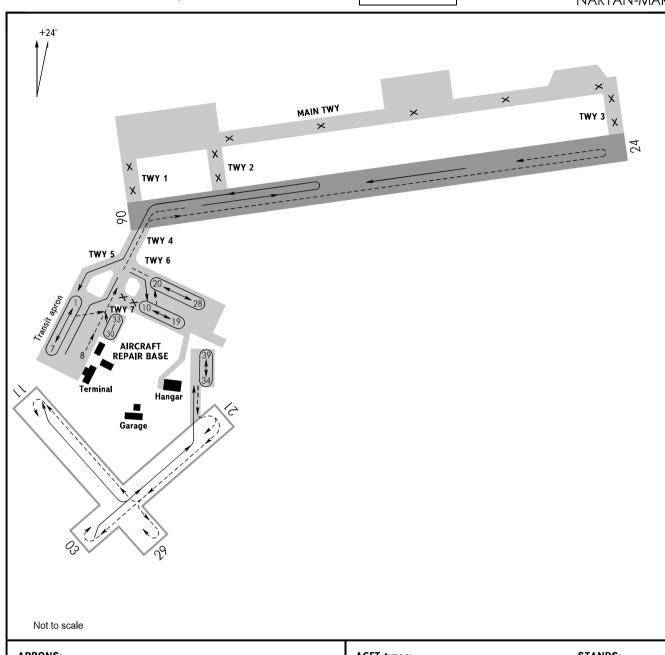

٨	DD	n	NIS	٠.

1. Transit, helicopter, aeroplane (An-2, TVS-2MS - in summer):

- Reinforced Concrete Surface: Strength: - PCN 30/R/C/X/T

2. Aeroplane (An-2, TVS-2MS - in winter):

Surface: - Grass

Strength: - 5.5tons

TAXIWAYS:

Width: 4-6

4-6 - Reinforced Concrete Surface:

Strength: 4-6 - PCN 28/R/C/X/T

STANDS:

Surface: 1-8, 10-28, 30-33 - Reinforced Concrete

- Grass

Strength: 1-8, 10-28, 30-33 - PCN 30/R/C/X/T

> 34-39 (winter) - 5.5 tons

ACFT types: STANDS: Index 4 ACFT

1-3 4-8

Index 3 ACFT

An-2, TVS-2MS (in summer) 30-33

An-2, TVS-2MS (in winter) 34-39

Mi-8 and its modifications, smaller HEL 10-28

WARNING

Width of RWY 06/24 is less than the required standard.

Flight crews shall exercise extreme caution, when executing take-off, landing and during taxiing of ACFT.

The maximum crosswind value is reduced by 5% during take-off, landing and taxiing of index 4 ACFT.

CHANGE: New chart