


STANDARD DEPARTURE CHART  
INSTRUMENT (SID) - ICAO

STREZHEVOY, RUSSIA  
STREZHEVOY  
RNAV RWY 33

TRANSITION ALT: 3000'  
TRANSITION HGT: (865)

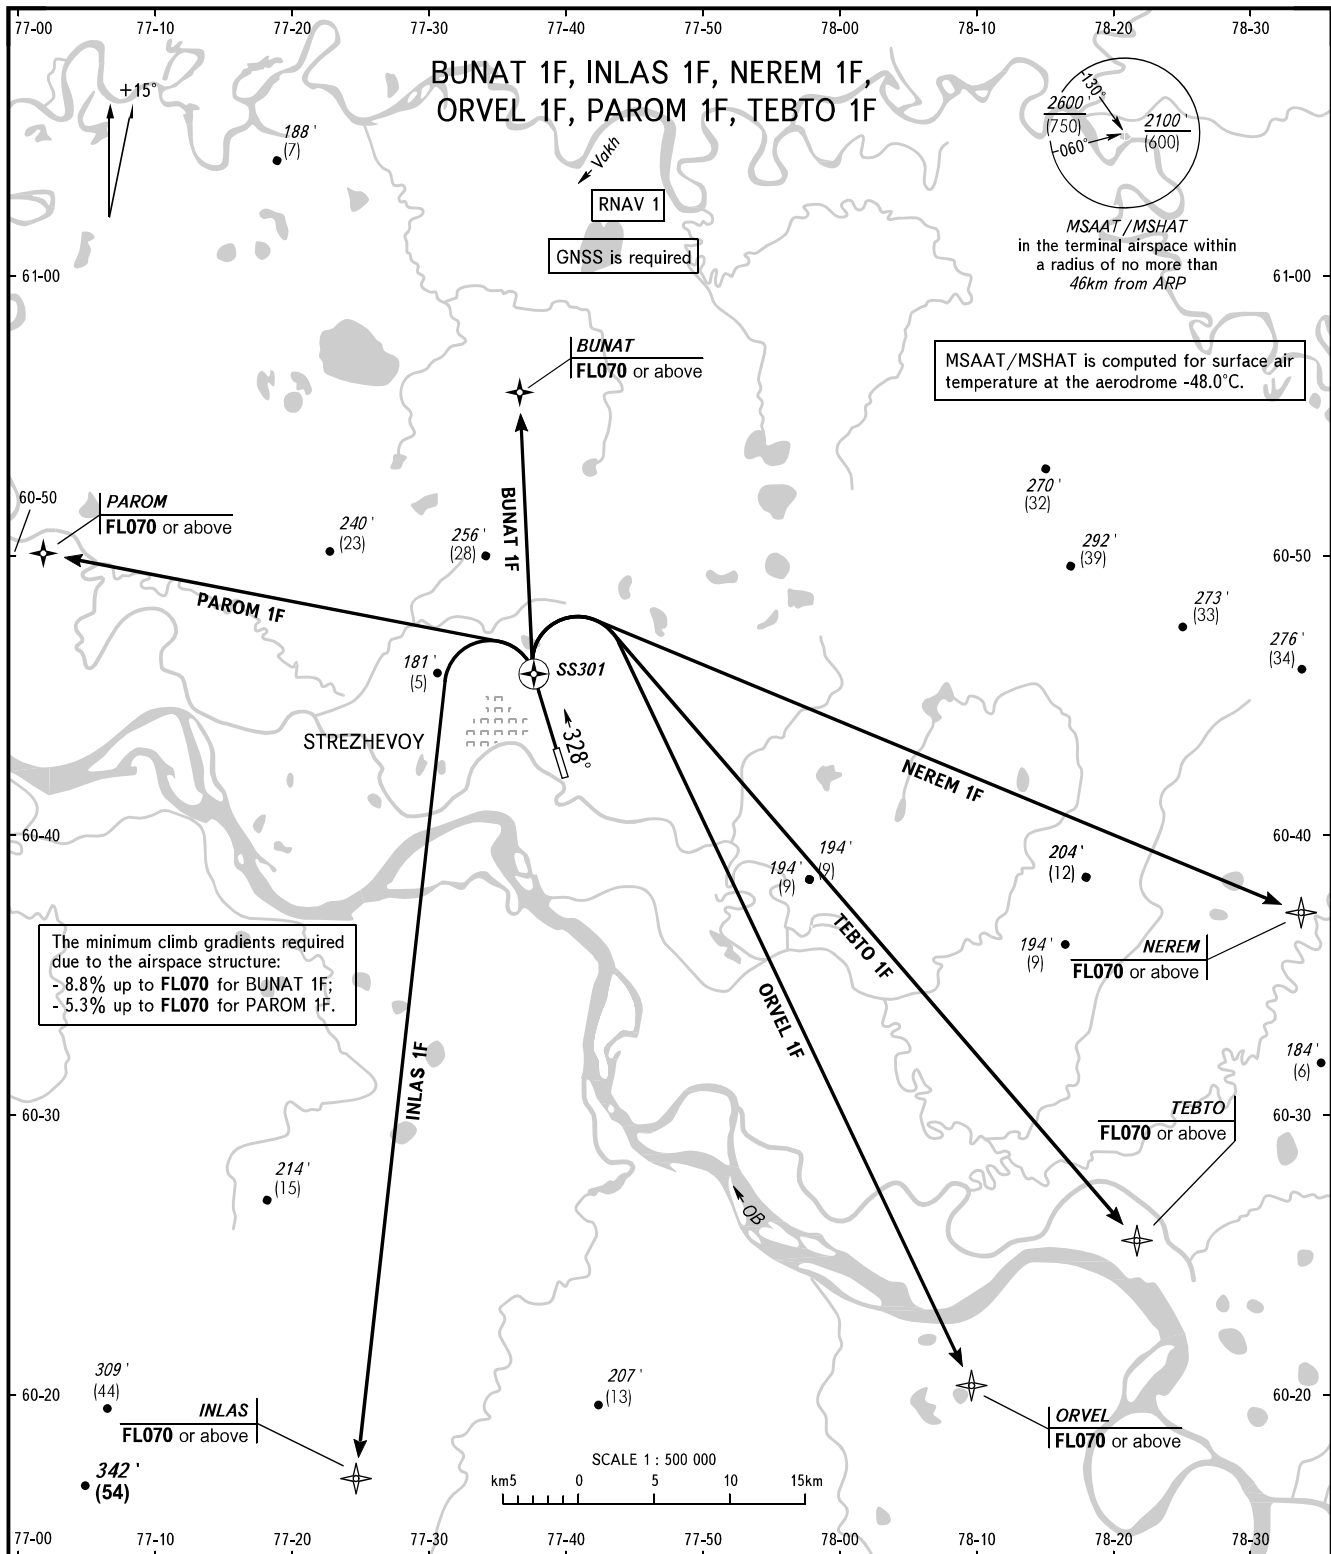

The minimum climb gradients required due to the airspace structure:  
- 8.8% up to FL070 for BUNAT 1F;  
- 5.3% up to FL070 for PAROM 1F.

KARAVAY RADAR 120.700

**NOTE:**

- HGT is given relative to AD ELEV 165'/50m.
- CCO are applicable in case of low air traffic intensity.
- Rate of climb may be assigned to flight crews to provide CCO in case of high air traffic intensity.
- In case of high air traffic intensity, CCO are applicable where practicable.

BEARINGS AND TRACKS ARE MAGNETIC  
ALTITUDES IN FEET  
HEIGHTS IN METRES  
ELEVATIONS IN FEET AND METRES  
DISTANCES IN KILOMETRES

Alt set: -QNH(QFE on req);  
-hPa(mm on req).