STANDART DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT: *7000 '*
TRANSITION HGT: **(1800)**

MAGAS, RUSSIA
MAGAS
RWY 09

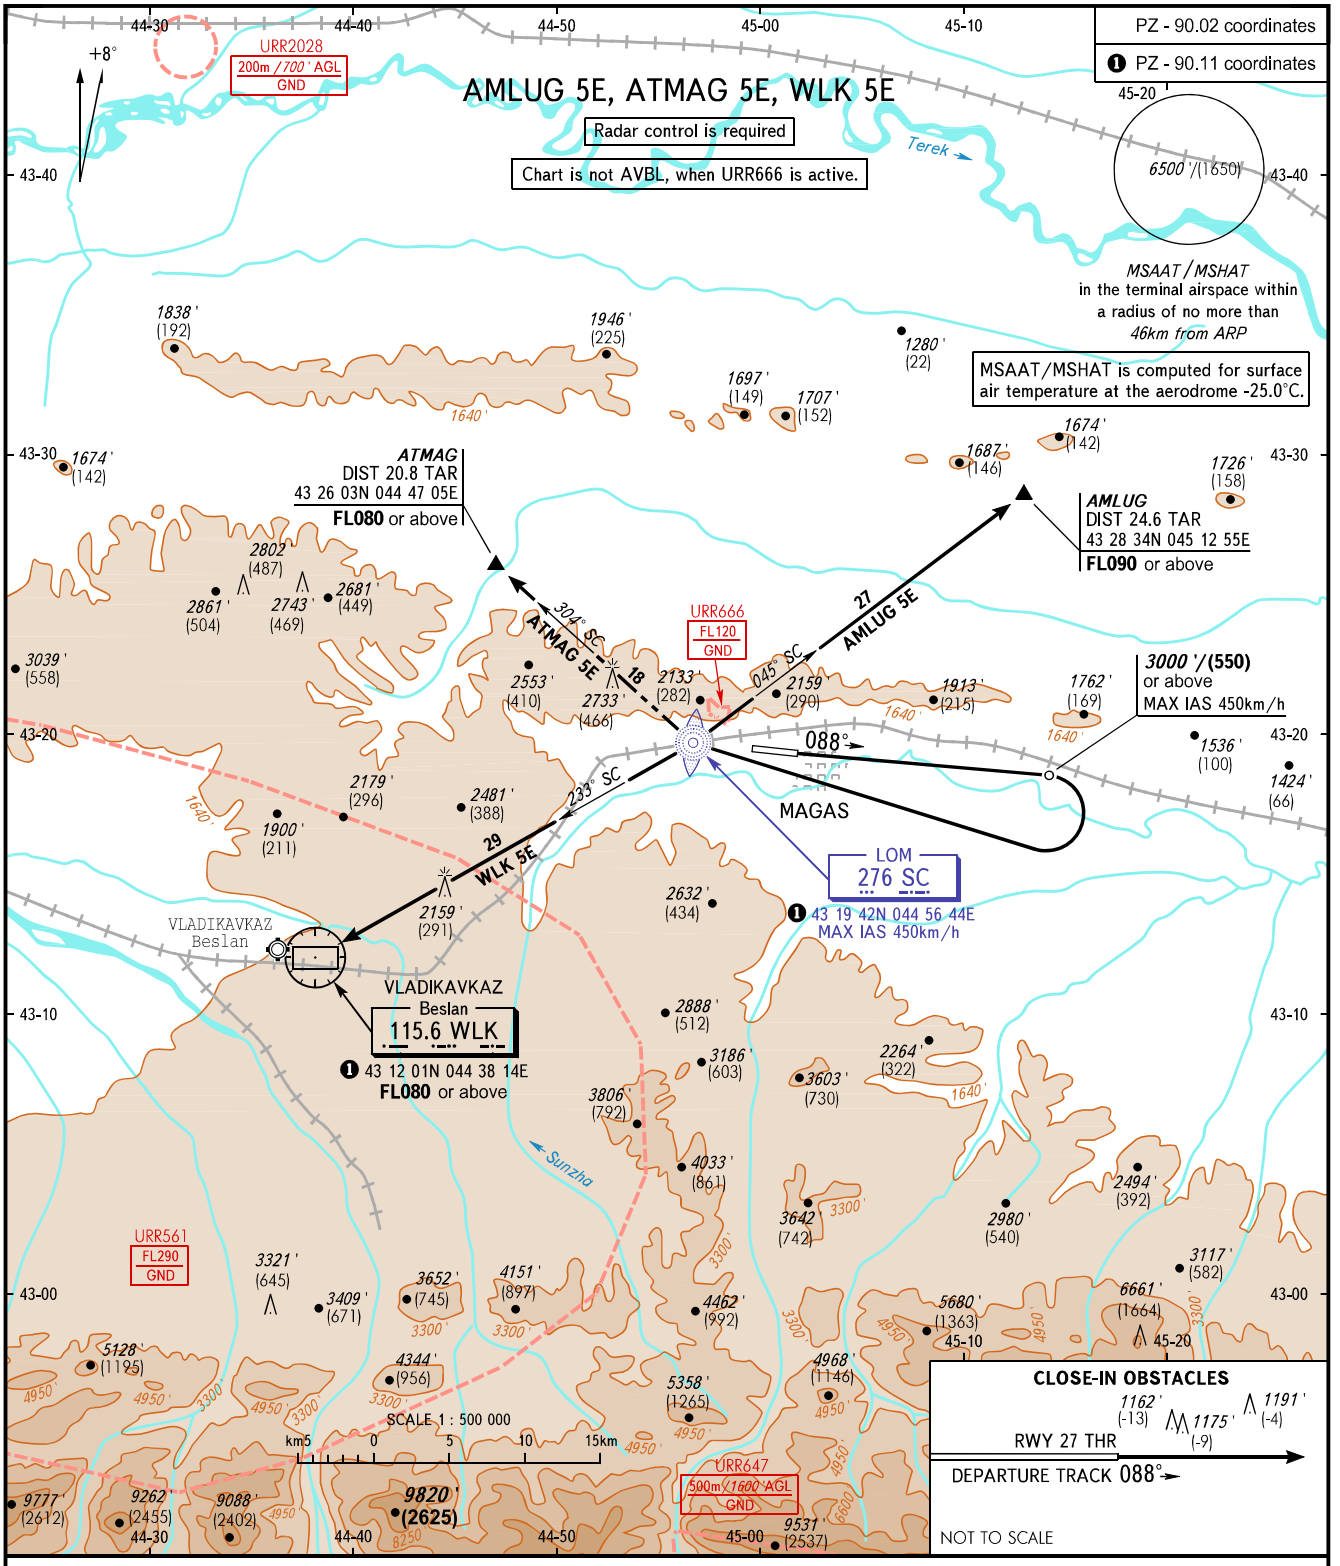

VYSHKA **119.150**

The minimum climb gradients required due to the airspace structure:
- 3.6% up to FL090 for AMLUG 5E;
- 3.7% up to FL080 for ATMAG 5E.

WARNING:
1. TAR reads zero at RWY 09 THR.
2. WLK 5E is not AVBL, when URR561 is active.
3. Turn before DER is PROHIBITED.

BEARINGS AND TRACKS ARE MAGNETIC ELEVATIONS AND ALTITUDES IN *FEET* HEIGHTS IN METRES DISTANCES IN KILOMETRES	Alt set: -QNH(QFE on req); -hPa(mm on req).

CHANGE: Heading