
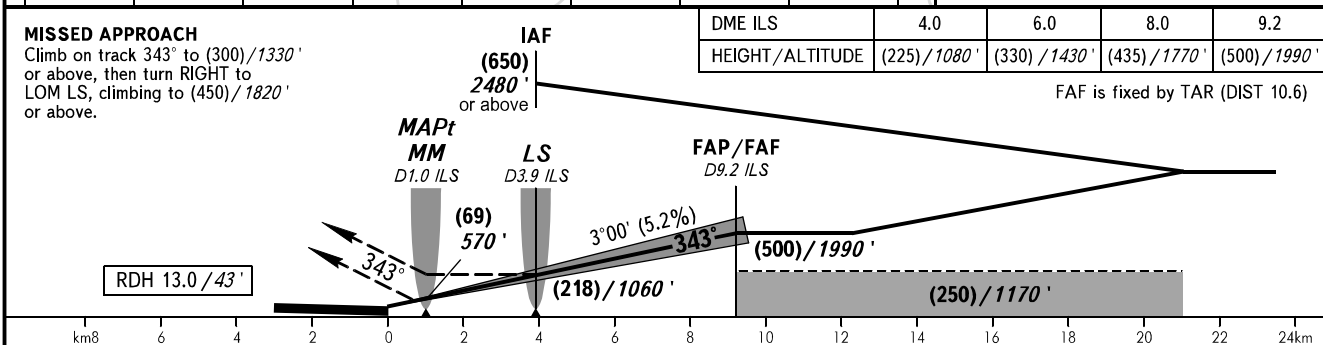


**INSTRUMENT
APPROACH
CHART - ICAO**

**NYAGAN, RUSSIA
NYAGAN
ILS X, LOC X RWY 34**

TOWER **122.300**

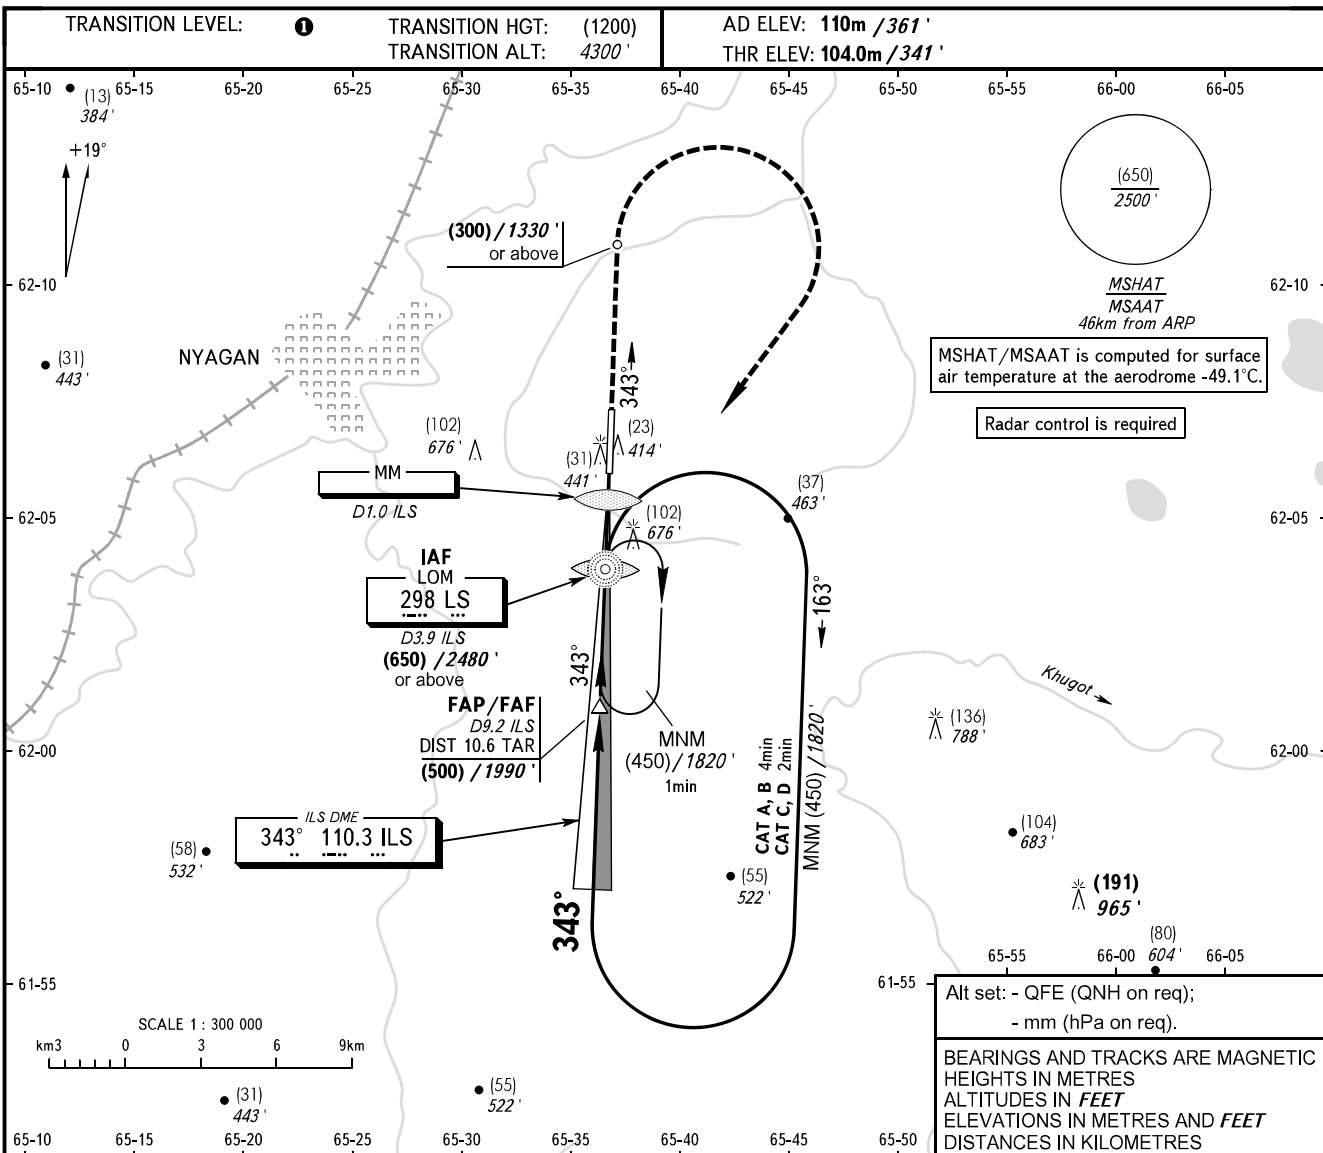

OCA(H)		A	B	C	D					
Straight-in	ILS	166 (62) 545'	169 (65) 555'	172 (68) 565'	175 (71) 575'					
	LOC	220 (120) 730'	220 (120) 730'	220 (120) 730'	220 (120) 730'					
Circling		235 (125) 770'	300 (190) 990'	330 (220) 1090'	330 (220) 1090'					
GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390
FAF - MAPt 8.2 km	min:sec	3:18	2:45	2:21	2:04	1:50	1:39	1:30	1:22	1:16
RATE OF DESCEND	m/s	2.2	2.6	3.0	3.5	3.9	4.3	4.8	5.2	5.6

TRANSITION LEVEL:
- FL050 when QFE is 760mm mercury column (1013 hPa) or above;
- FL060 when QFE is less than 760mm mercury column (1013 hPa), but 733mm mercury column (977 hPa) or above;
- FL070 when QFE is less than 733mm mercury column (977 hPa).

WARNING:
1. MAPt at MM. Turn before MAPt is PROHIBITED.
2. TAR reads zero at ARP.
3. ILS DME ILS reads zero at RWY 34 THR.

CHANGE: New chart