
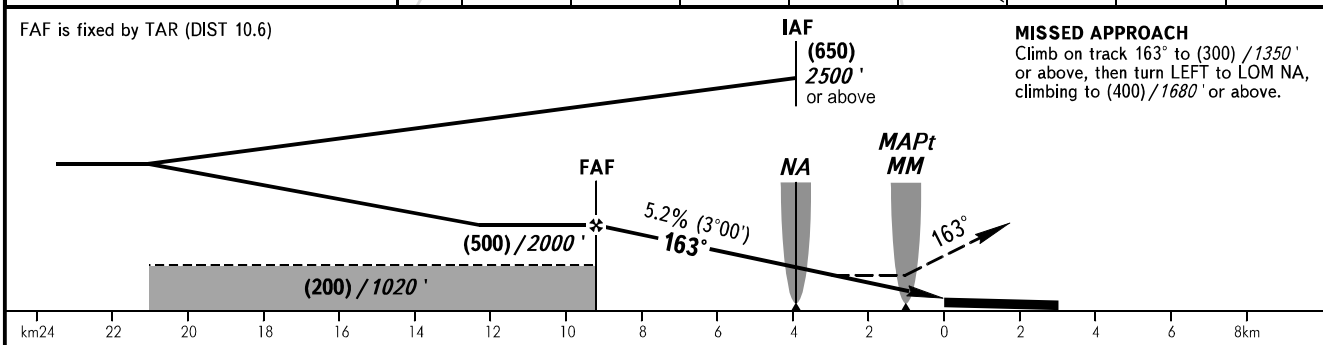


**INSTRUMENT  
APPROACH  
CHART - ICAO**

TOWER	122.300
-------	---------

**NYAGAN, RUSSIA**  
NYAGAN  
NDB Y RWY 16

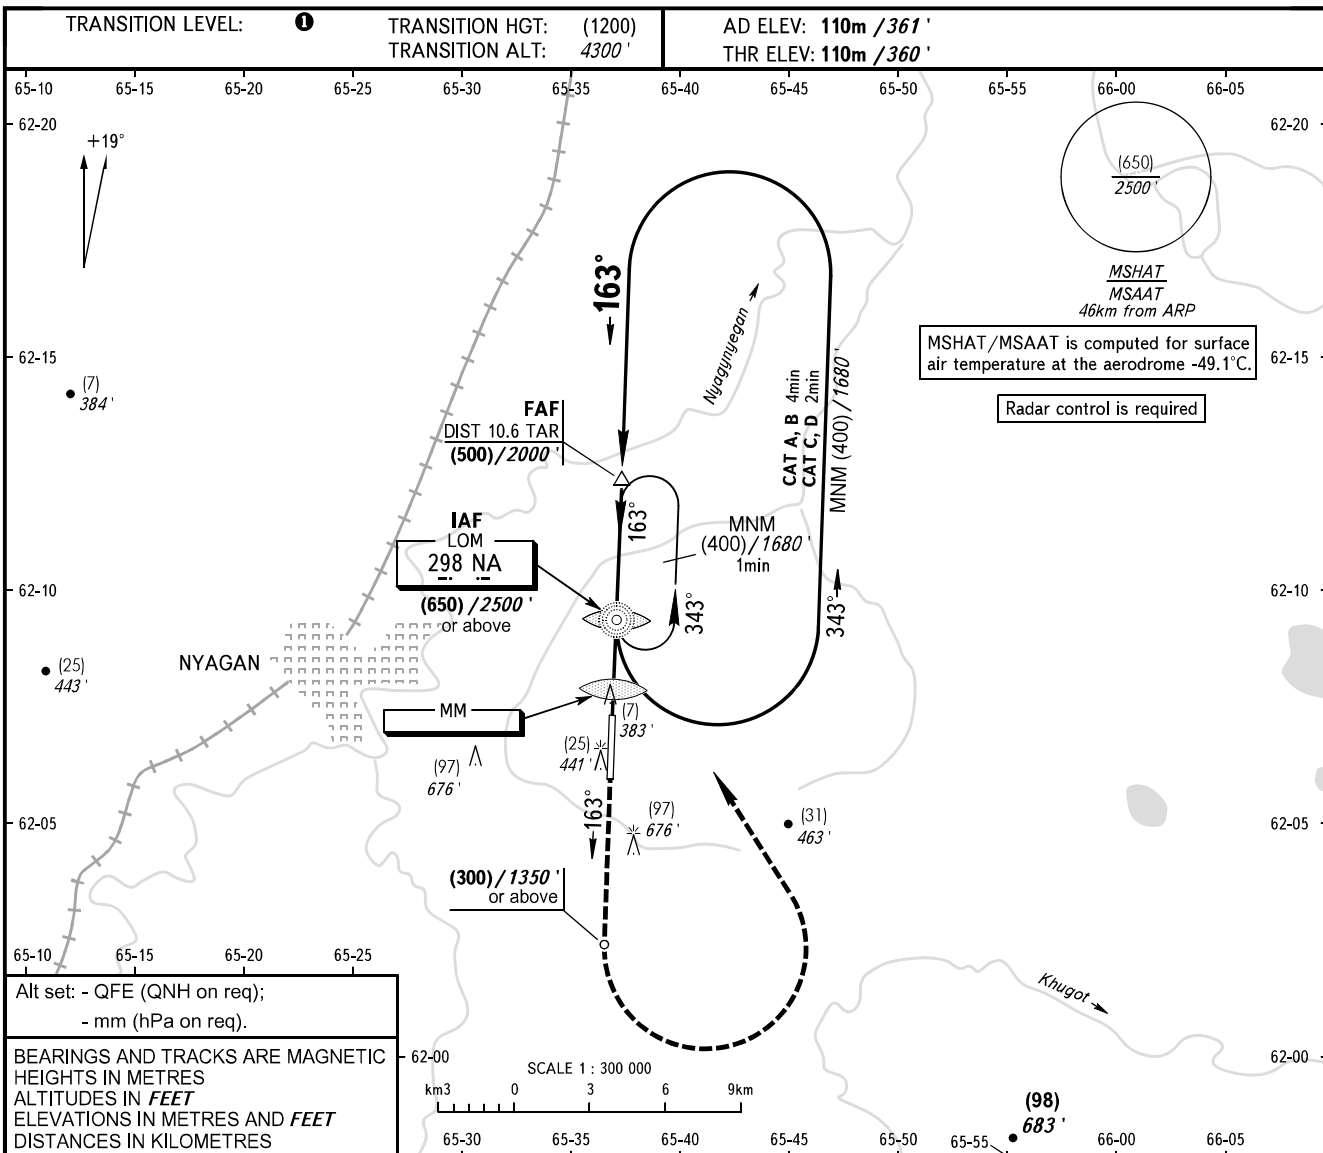

OCA(H)		A	B	C	D					
Straight-in		195 (85) 640'	195 (85) 640'	195 (85) 640'	195 (85) 640'					
	Approach									
Circling		235 (125) 770'	300 (190) 990'	330 (220) 1090'	330 (220) 1090'					
GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390
FAF - MAPt 8.2 km	min:sec	3:19	2:46	2:22	2:04	1:51	1:40	1:30	1:23	1:17
RATE OF DESCEND	m/s	2.2	2.6	3.0	3.5	3.9	4.3	4.8	5.2	5.6

**TRANSITION LEVEL:**  
- FL050 when QFE is 760mm mercury column (1013 hPa) or above;  
- FL060 when QFE is less than 760mm mercury column (1013 hPa), but 733mm mercury column (977 hPa) or above;  
- FL070 when QFE is less than 733mm mercury column (977 hPa).

**WARNING:**  
1. MAPt at MM.  
2. Turn before MAPt is PROHIBITED.  
3. TAR reads zero at ARP.

CHANGE: New chart