


**INSTRUMENT
APPROACH
CHART - ICAO**

NYAGAN, RUSSIA
NYAGAN
NDB Y RWY 34

TOWER **122.300**

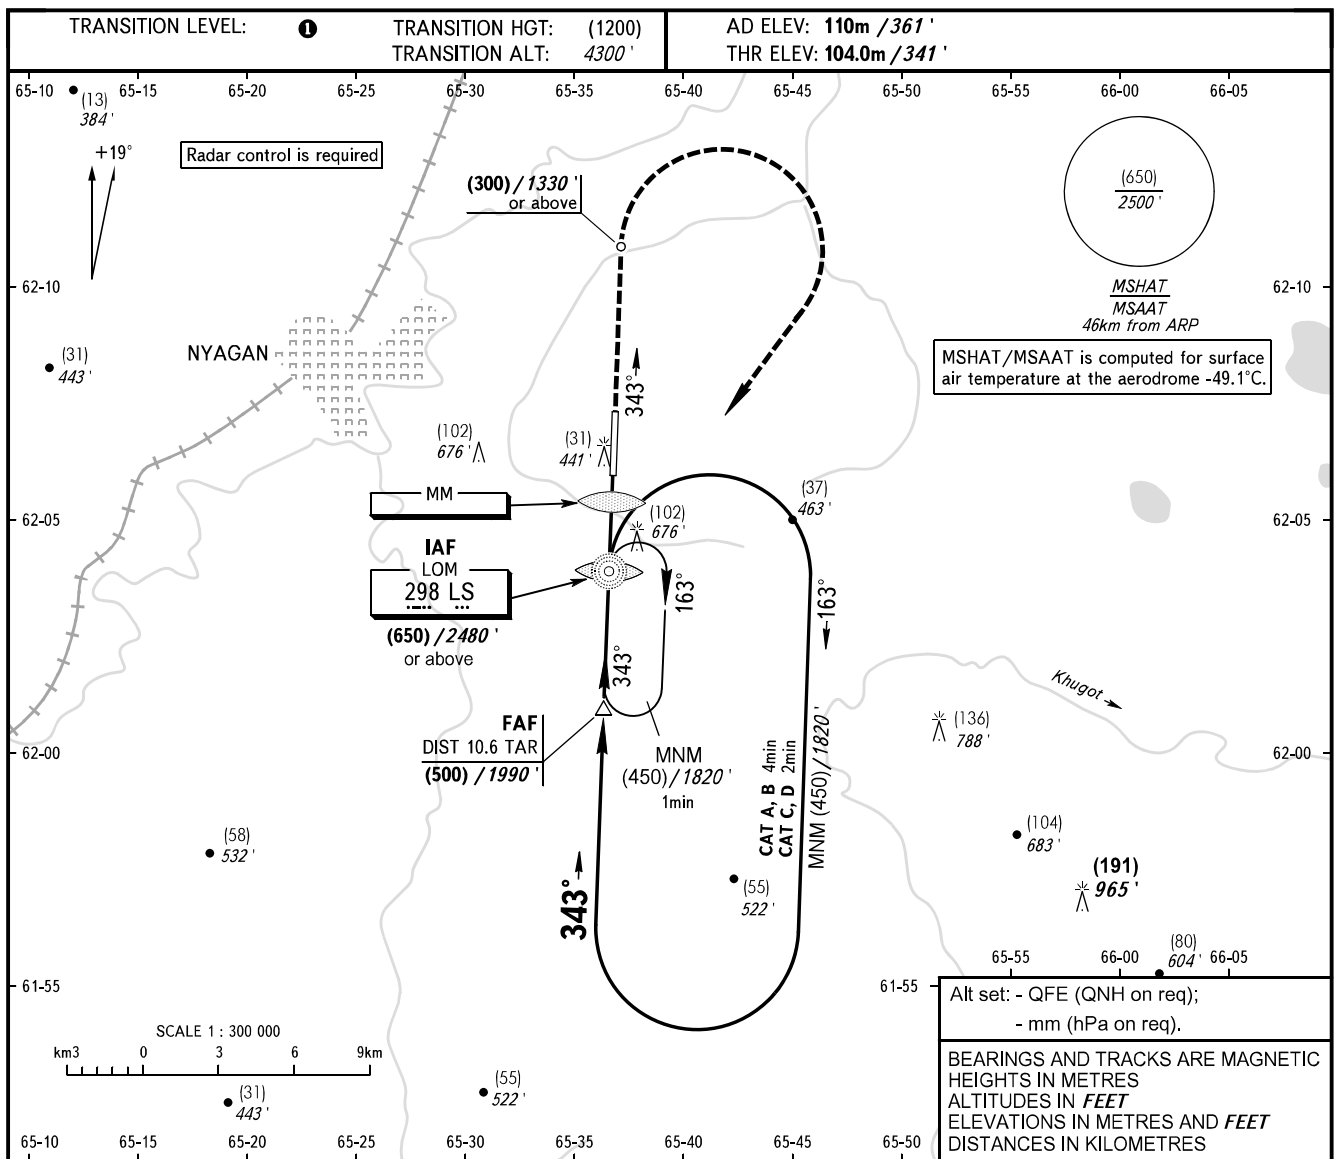


MISSED APPROACH

Climb on track 343° to (300)/1330' or above, then turn RIGHT to LOM LS, climbing to (450)/1820' or above.

IAF

FAF is fixed by TAR. (DIST 10.6)

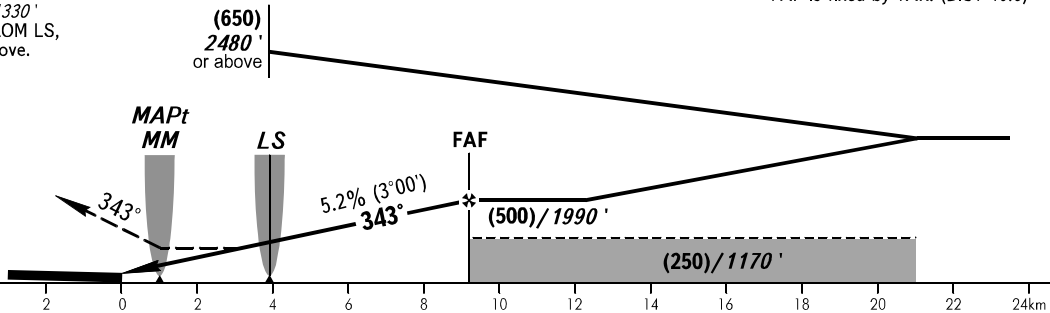

OCA(H)		A	B	C	D
Straight-in		285 (180) 940'	285 (180) 940'	285 (180) 940'	285 (180) 940'
	Approach				
Circling		235 (125) 770'	300 (190) 990'	330 (220) 1090'	330 (220) 1090'

1 TRANSITION LEVEL:

- FL050 when QFE is 760mm mercury column (1013 hPa) or above;
- FL060 when QFE is less than 760mm mercury column (1013 hPa), but 733mm mercury column (977 hPa) or above;
- FL070 when QFE is less than 733mm mercury column (977 hPa).

WARNING:

- MAPt at MM. Turn before MAPt is PROHIBITED.
- TAR reads zero at ARP.

GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390
FAF - MAPt 8.2 km	min:sec	3:18	2:45	2:21	2:04	1:50	1:39	1:30	1:22	1:16
RATE OF DESCEND	m/s	2.2	2.6	3.0	3.5	3.9	4.3	4.8	5.2	5.6