



**INSTRUMENT
APPROACH
CHART - ICAO**

**NADYM, RUSSIA
NADYM
ILS X CAT I, LOC X RWY 14**

RADAR **135.400**
START **120.600**

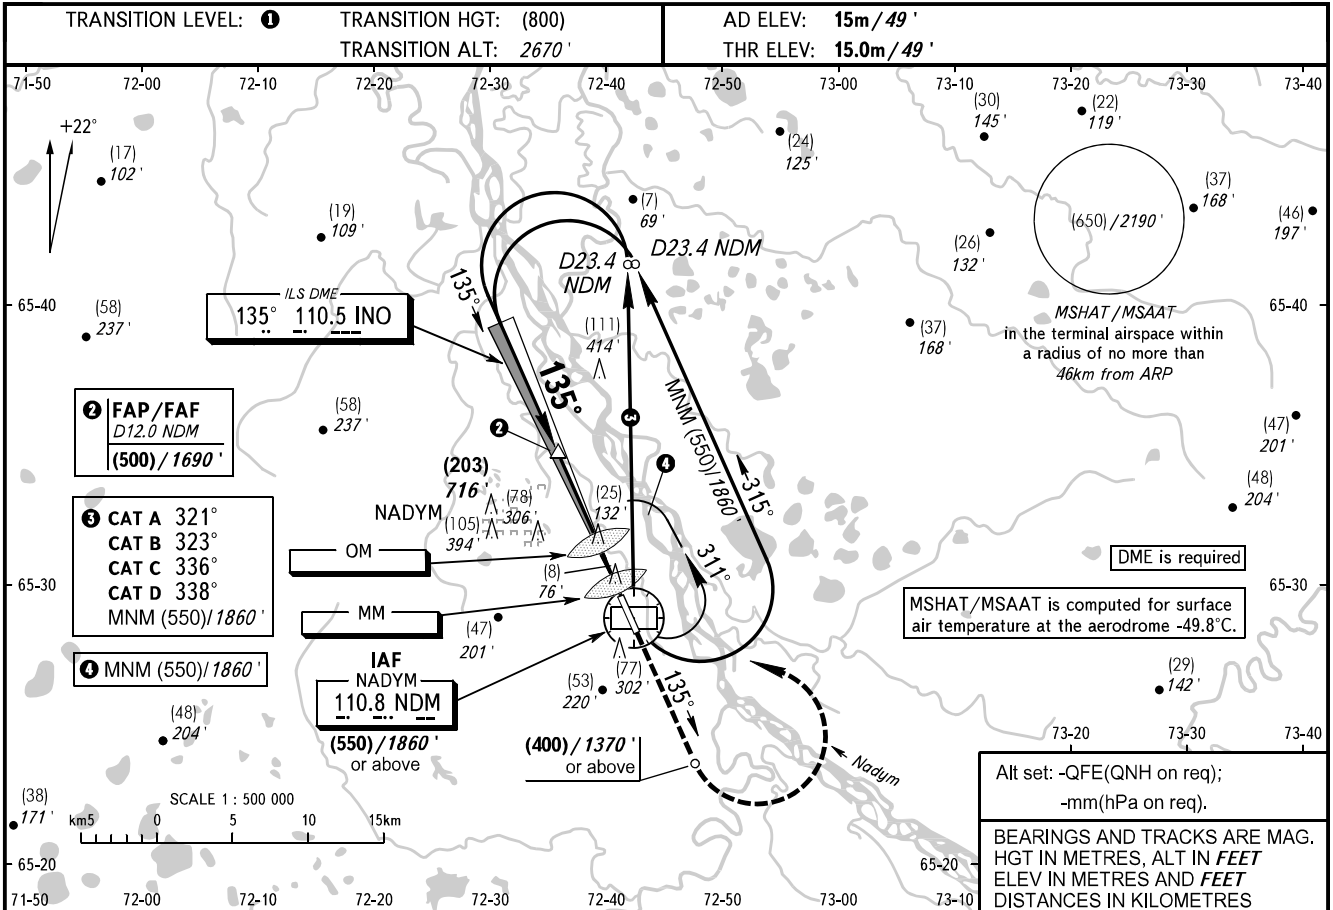

DME NDM	12.0	10.0	8.0	6.0	4.0
HEIGHT/ALTITUDE	(500)/1690'	(407)/1385'	(313)/1076'	(219)/766'	(124)/456'

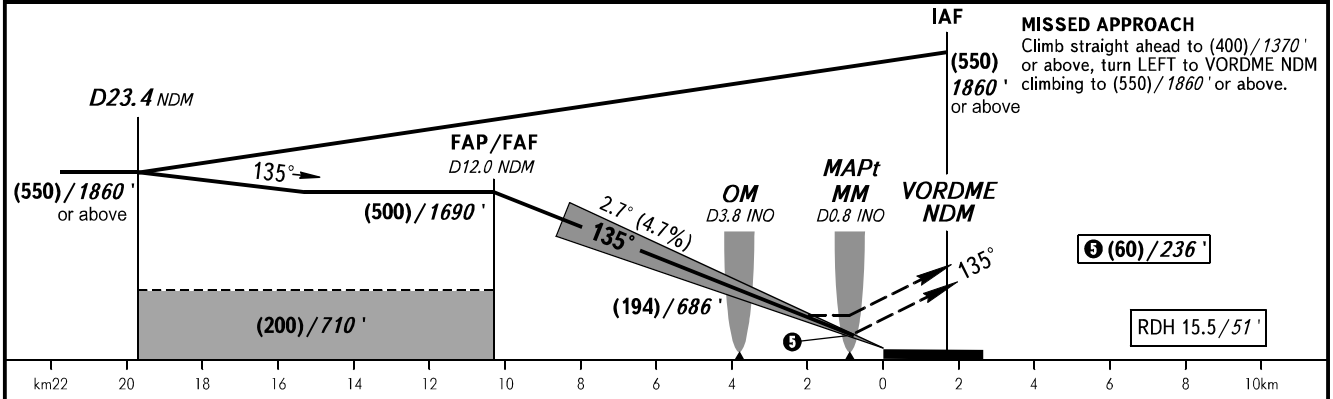

OCA(H)		A	B	C	D
Straight-in Approach	CAT I	63(48) 207'	66(51) 217'	69(54) 227'	71(56) 233'
	LOC	115(100) 380'	115(100) 380'	115(100) 380'	115(100) 380'
Circling		185(170) 610'	185(170) 610'	215(200) 710'	240(225) 790'

1 TRANSITION LEVEL:
- FL040 when QFE is 751mm mercury column or above (1001 hPa);
- FL050 when QFE is less than 751mm mercury column (1001 hPa).
NOTE:
1. ILS DME INO reads zero at RWY 14 THR.
2. MAPt at MM (LOC). Timing not authorized for defining MAPt.
3. Turn before passing MAPt is PROHIBITED.

GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390
	kt	81	97	113	130	146	162	178	194	211
RATE OF DESCENT	m/s	2.0	2.4	2.8	3.1	3.5	3.9	4.3	4.7	5.1
	ft/min	387	464	542	619	696	774	851	928	1006

CHANGE.COM