STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION HEIGHT : **(800)**
TRANSITION ALTITUDE: ***2670 '***

NADYM, RUSSIA
NADYM
RNAV RWY 14

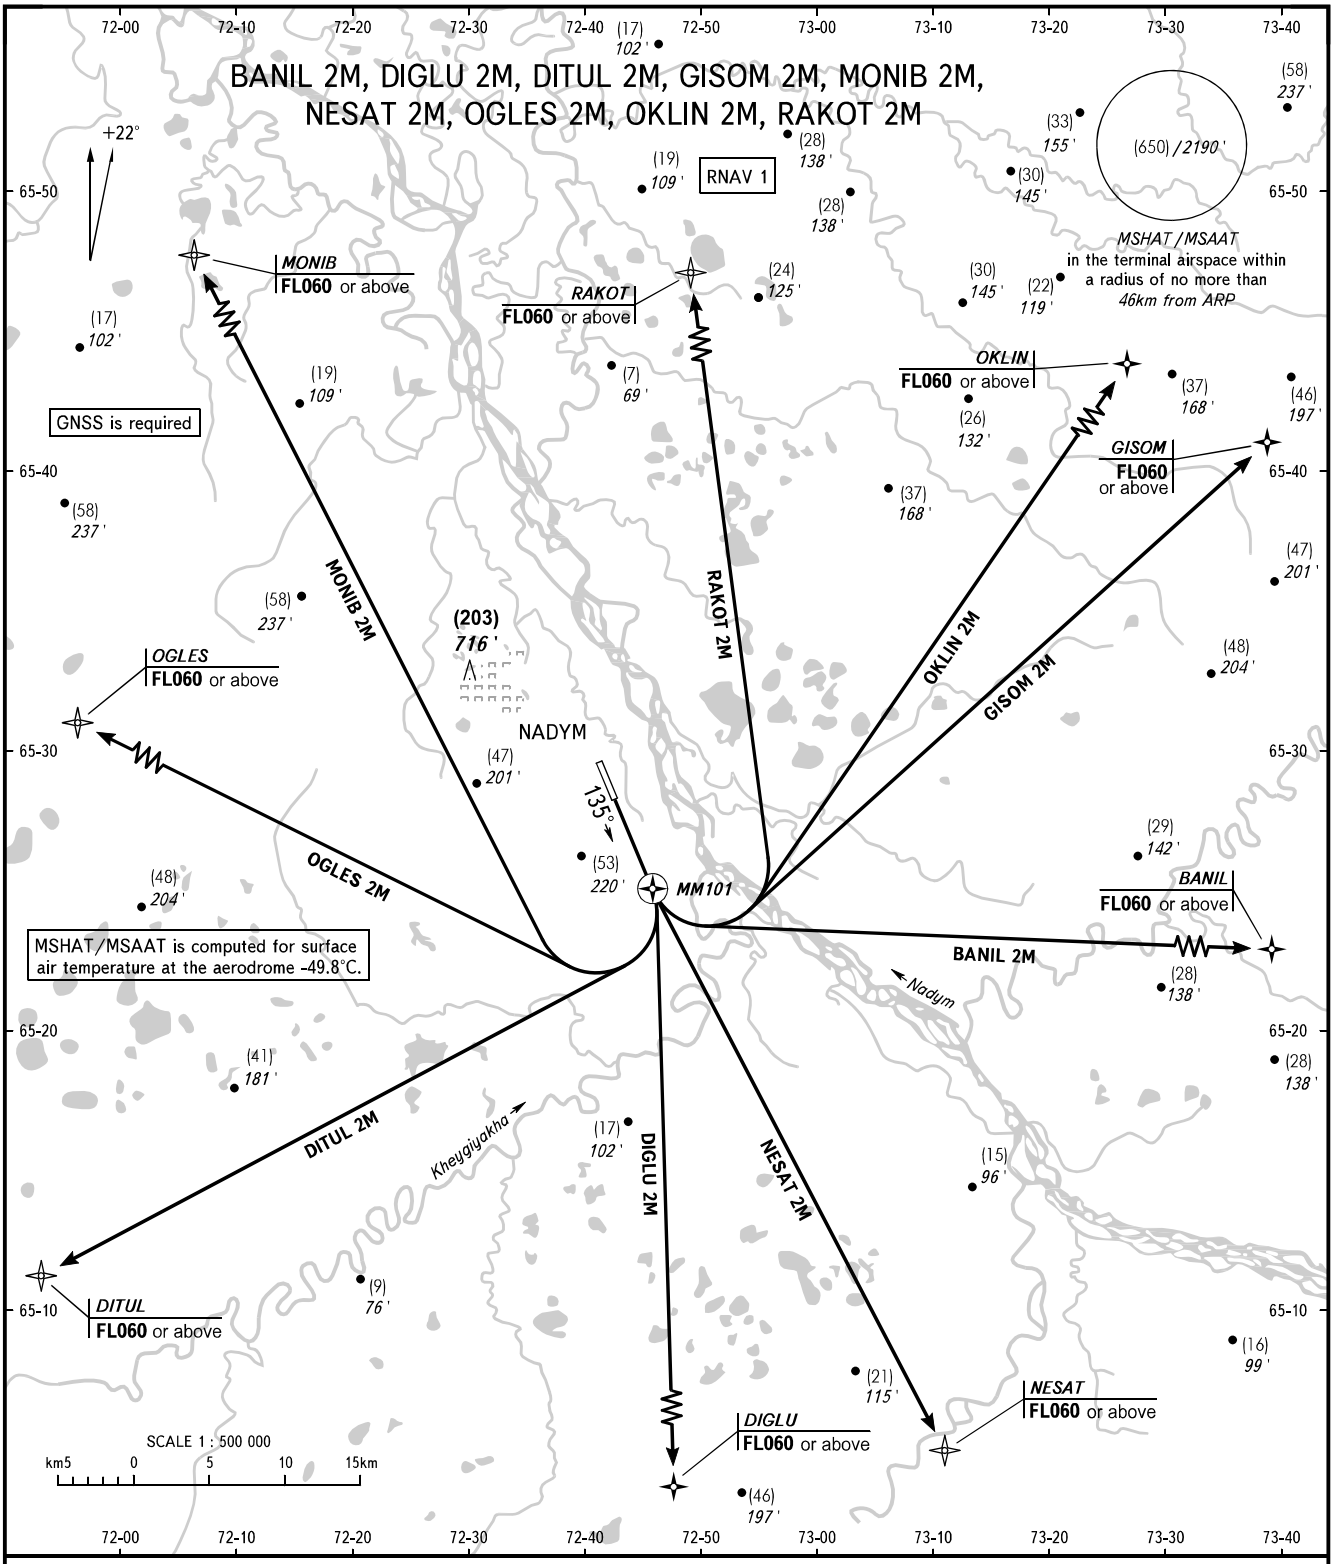

START	**120.600**
RADAR	**135.400**

WARNING
The minimum climb gradients are as follows (required due to the airspace structure):
- 3.5% up to FL060 for BANIL 2M;
- 3.8% up to FL060 for NESAT 2M.

NOTE:
1. CCO is applicable in case of low air traffic intensity.
2. Rate of climb may be assigned to flight crews to provide CCO in case of high air traffic intensity.
3. ATS unit uses "Direct to" procedure for the purpose of CCO.
4. In case of high air traffic intensity, CCO is applicable where practicable.

BEARINGS AND TRACKS ARE MAGNETIC
ALTITUDES IN ***FEET***, HEIGHTS IN METRES
ELEVATIONS IN METRES AND ***FEET***
DISTANCES IN KILOMETRES

Alt set: -QFE(QNH on req);
-mm(hPa on req).

CHANGE: COM