


STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO

NOVY URENGOY, RUSSIA
NOVY URENGOY
RNAV RWY 09

TRANSITION
LEVEL: 1

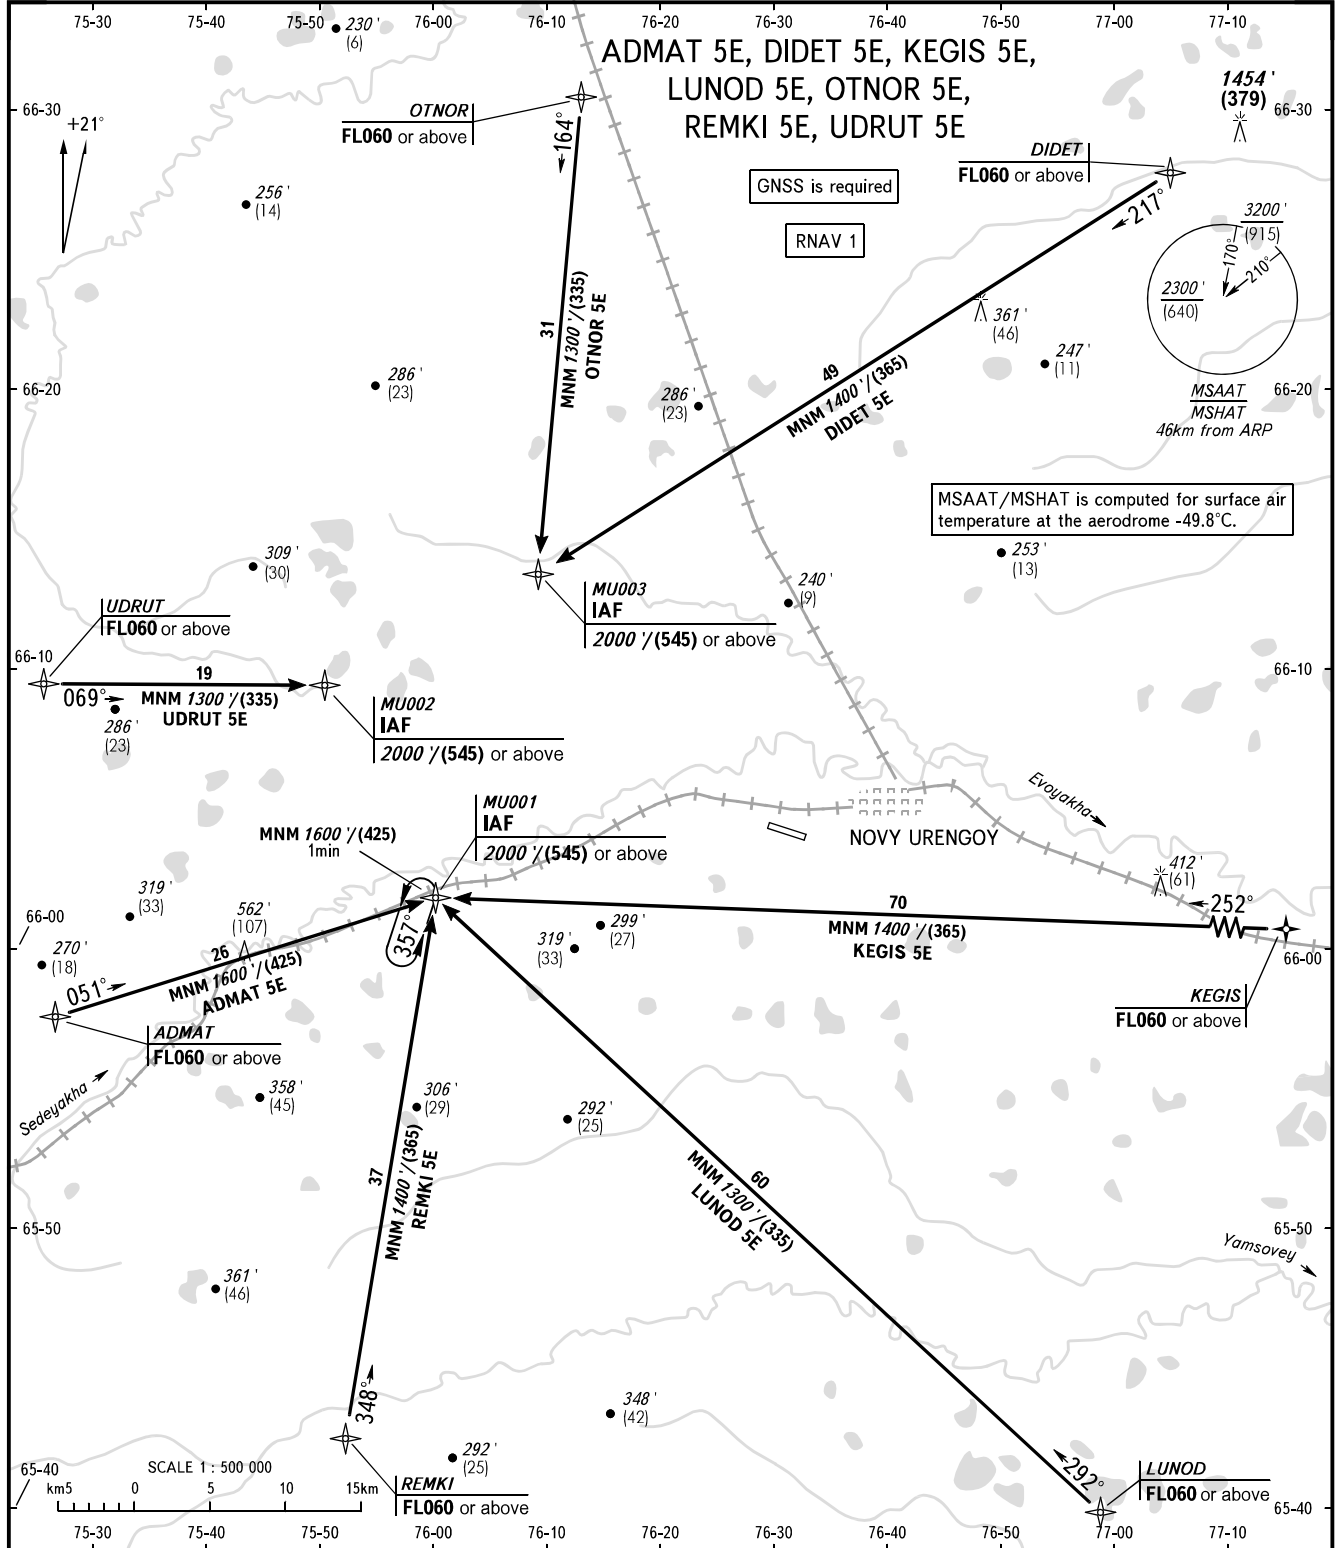

RADAR 124.700
TOWER 121.900

- 1 TRANSITION LEVEL:
 - FL060 when QNH is 1013 hPa (760mm mercury column) or above;
 - FL070 when QNH is 977 hPa (733mm mercury column) or above,
 but less than 1013 hPa (760mm mercury column);
 - FL080 when QNH is less than 977 hPa (733mm mercury column).

WARNING:

1. Flight crew shall consider the influence of wind and atmospheric pressure on calculation of descent profile.
2. Continuous descent operation (CDO) is applied if there is no conflicting traffic.
3. Continuous descent operation (CDO) can be cancelled by ATS unit in case of necessity to provide separation.
4. In case of intensive air traffic, ATS unit will issue next clearance to provide Continuous descent operation (CDO) in advance, as far as practicable.
5. Altitude restrictions can be cancelled by ATS unit.

BEARINGS AND TRACKS ARE MAGNETIC
 ALTITUDES IN FEET
 ELEVATIONS IN FEET AND METRES
 HEIGHTS IN METRES
 DISTANCES IN KILOMETRES

Alt set: -QNH(QFE on req);
 -hPa(mm on req).

CHANGE: COM