
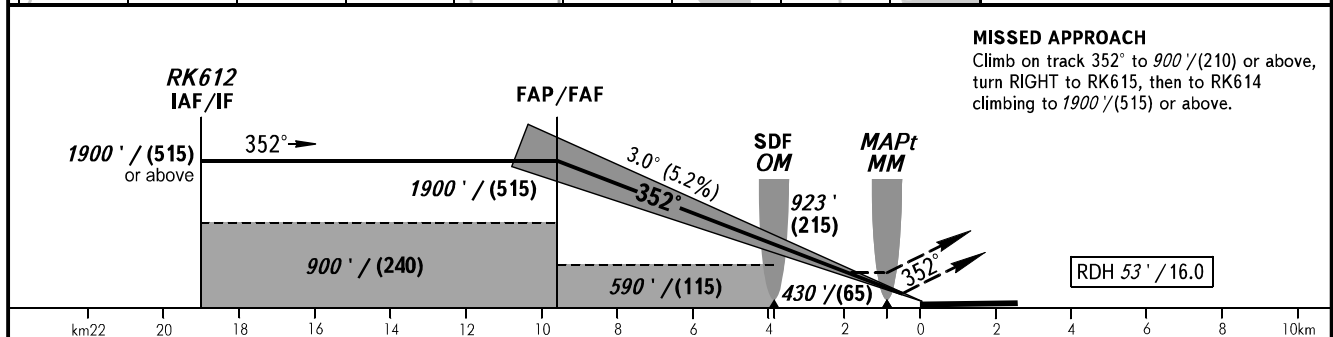


**INSTRUMENT
APPROACH
CHART - ICAO**

TOWER 119.400

KOGALYM, RUSSIA
KOGALYM
ILS Z CAT I, LOC Z RWY 35

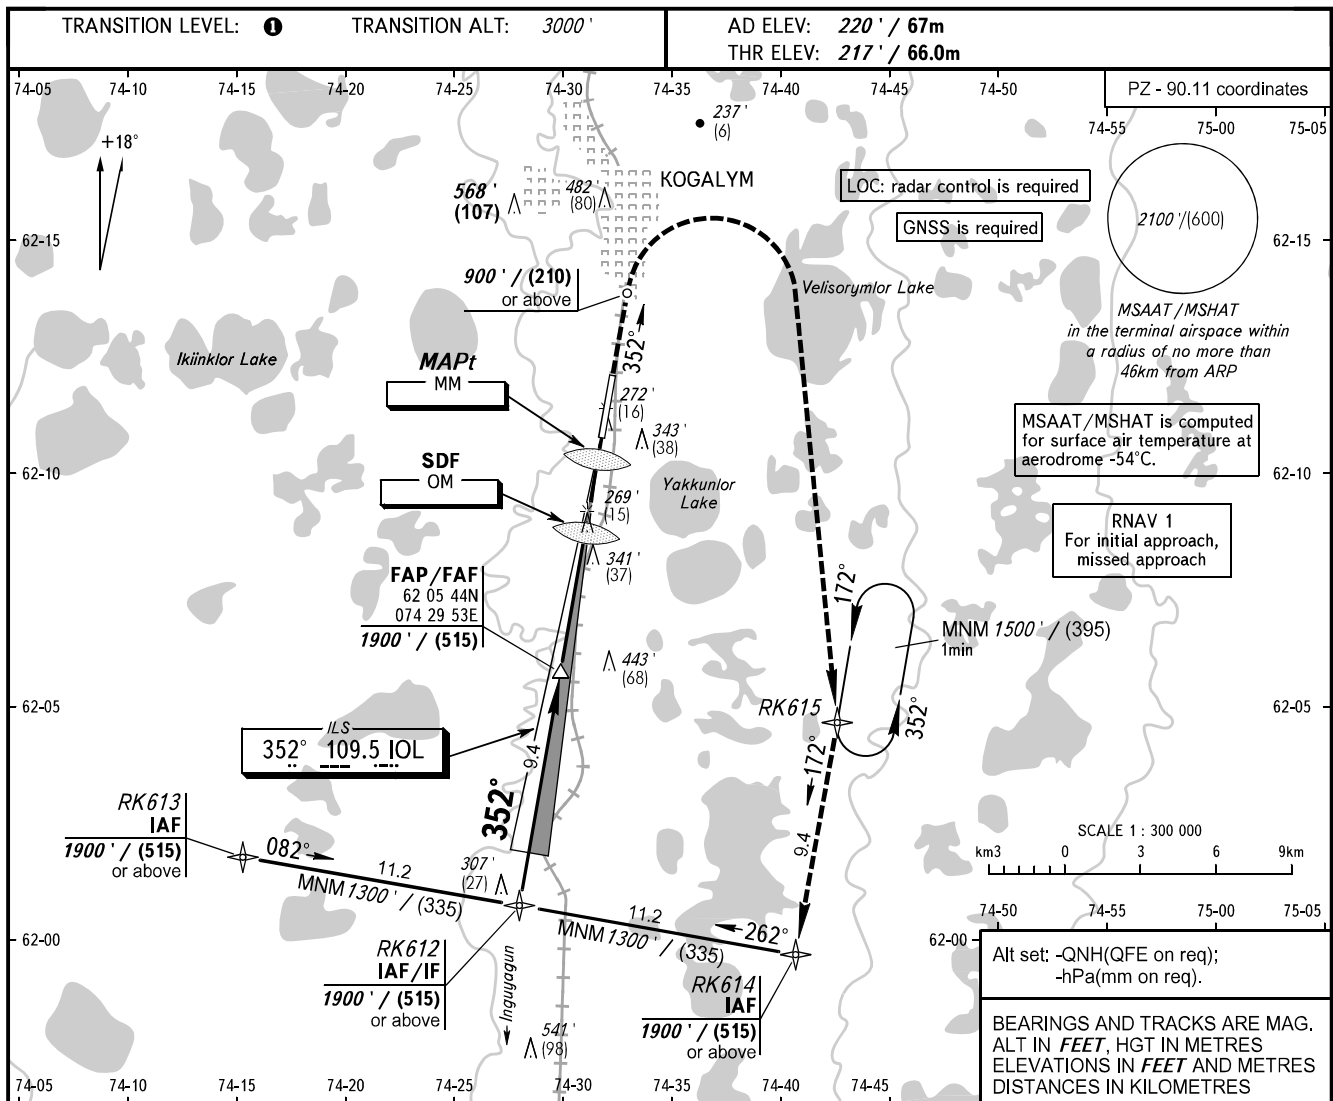

OCA(H)		A	B	C	D						
Straight-in Approach	CAT I	362' (145') (45)	374' (157') (48)	386' (169') (52)	400' (183') (56)						
	LOC	With SDF	520' (300') (95)	520' (300') (95)	520' (300') (95)	520' (300') (95)					
		WO SDF	590' (380') (115)	590' (380') (115)	590' (380') (115)	590' (380') (115)					
Circling		640' (420') (130)	720' (500') (155)	960' (740') (230)	960' (740') (230)						
GROUND SPEED		km/h	150	180	210	240	270	300	330	360	390
		kt	81	97	113	130	146	162	178	194	211
RATE OF DESCENT		m/s	2.2	2.6	3.0	3.5	3.9	4.3	4.8	5.2	5.6
		ft/min	427	512	597	682	768	853	938	1024	1109

① TRANSITION LEVEL:
 - FL040 when QNH is 1013 hPa (760mm mercury column) or above;
 - FL050 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column);
 - FL060 when QNH is less than 977 hPa (733mm mercury column).

WARNING
 MAPt at MM. Timing for defining MAPt is not authorized. Turn before MAPt is PROHIBITED.