INSTRUMENT APPROACH CHART - ICAO

RADAR	128.000
TOWER	118.200

SAMARA, RUSSIA
KURUMOCH
GLS RWY 05

GBAS	TRANSITION LEVEL: ❶	TRANSITION ALT: 4000 '	AD ELEV: 477 '
CH 20665 G05A		TRANSITION HGT: (1075)	THR ELEV: 477 '

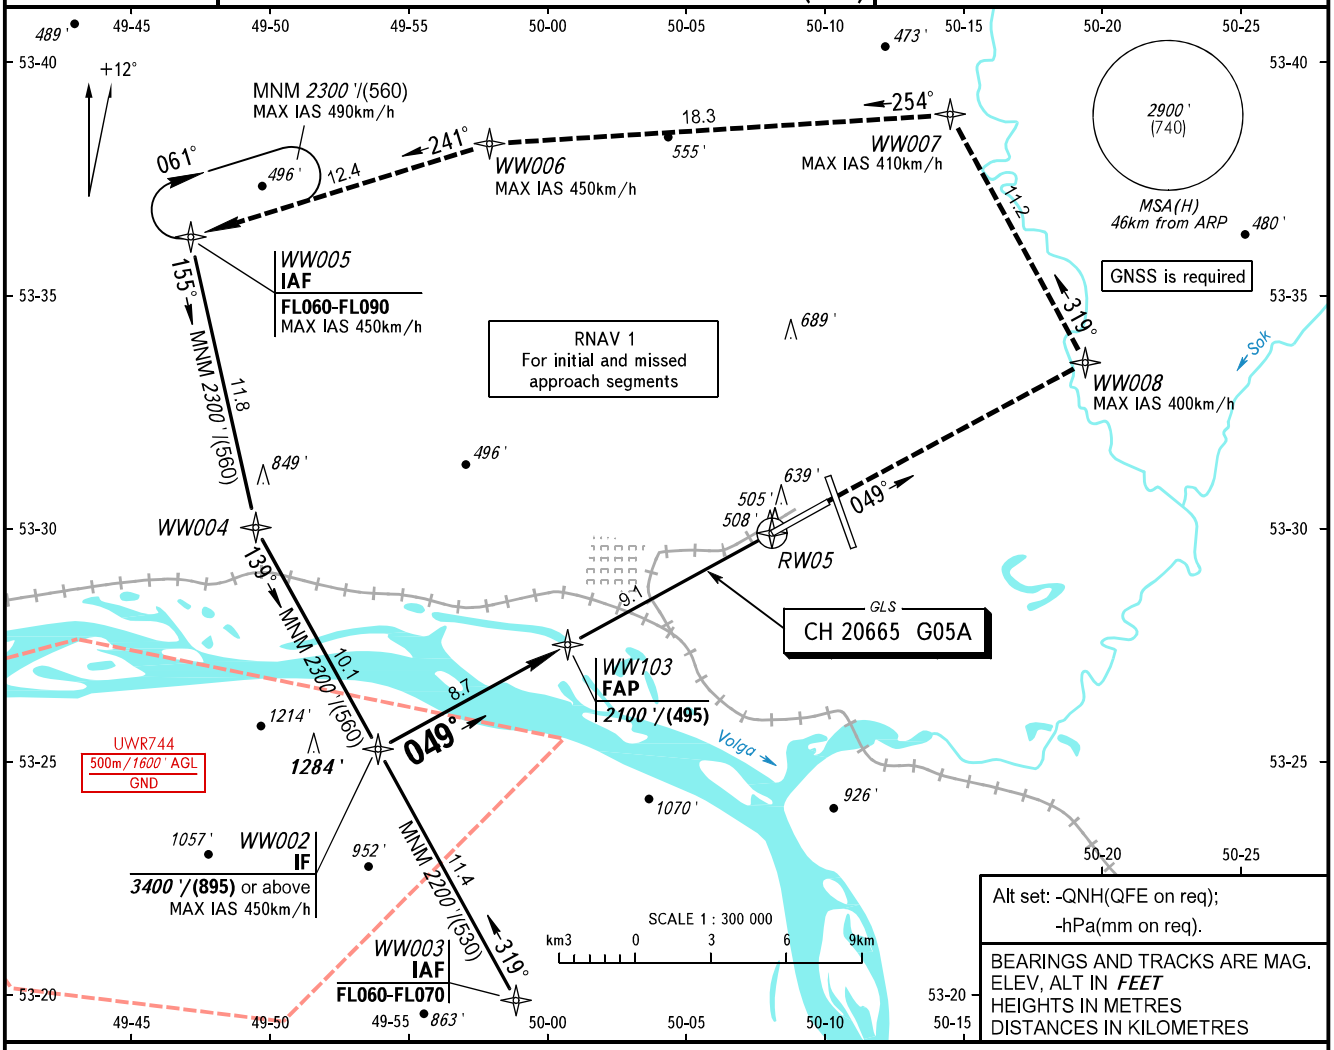

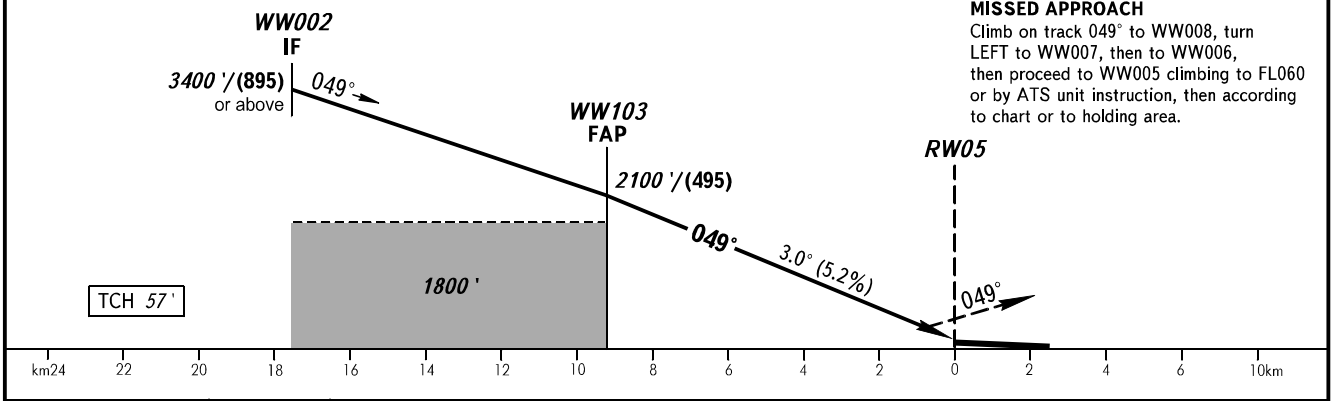

MISSED APPROACH
Climb on track 049° to WW008, turn LEFT to WW007, then to WW006, then proceed to WW005 climbing to FL060 or by ATS unit instruction, then according to chart or to holding area.

OCA(H)		A	B	C	D	DL
Straight-in Approach	CAT I	635 ' (158 ')	647 ' (170 ')	658 ' (181 ')	669 ' (192 ')	669 ' (192 ')
Circling		940 ' (460 ')	980 ' (500 ')	1090 ' (610 ')	1220 ' (740 ')	1220 ' (740 ')

❶ TRANSITION LEVEL:
- FL050 when QNH is 1013 hPa (760mm mercury column) or above;
- FL060 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column);
- FL070 when QNH is less than 977 hPa (733mm mercury column).

GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390
RATE OF DESCENT	m/s	2.2	2.6	3.0	3.5	3.9	4.3	4.8	5.2	5.6
RATE OF DESCENT	ft/min	427	512	597	682	768	853	938	1024	1109

CHANGE: New chart