



INSTRUMENT
APPROACH
CHART - ICAO

RADAR	120.300
TOWER	118.100

SANKT-PETERBURG, RUSSIA
PULKOVO
RNP Z RWY 10L

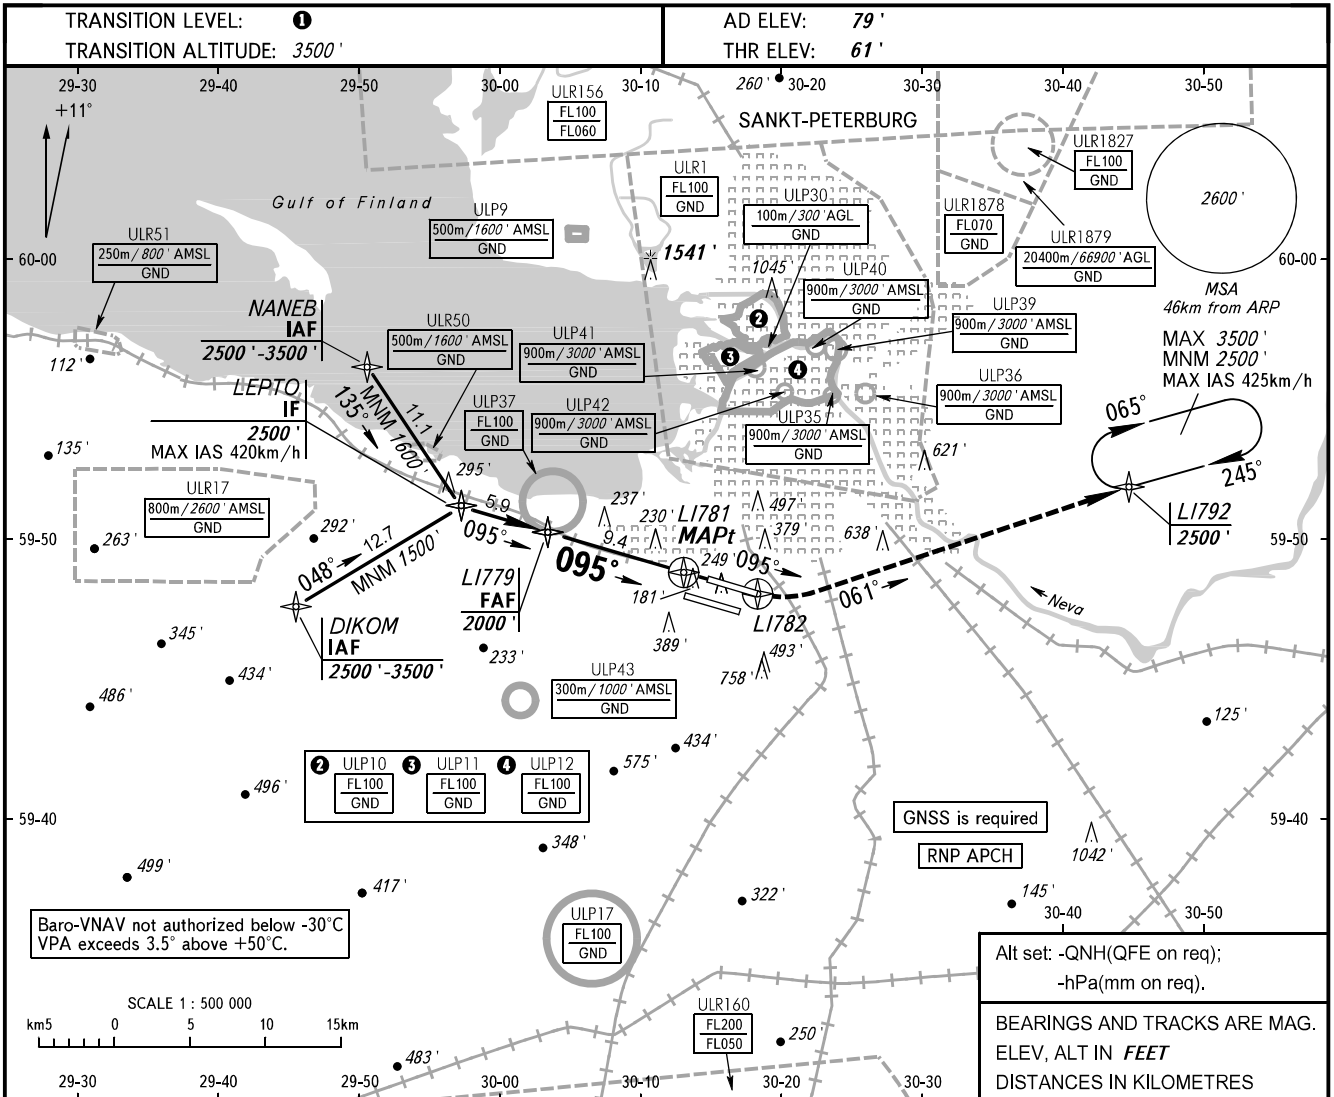

DIST to LI781	8.0	6.0	4.0	2.0
ALTITUDE	1768'	1425'	1080'	736'

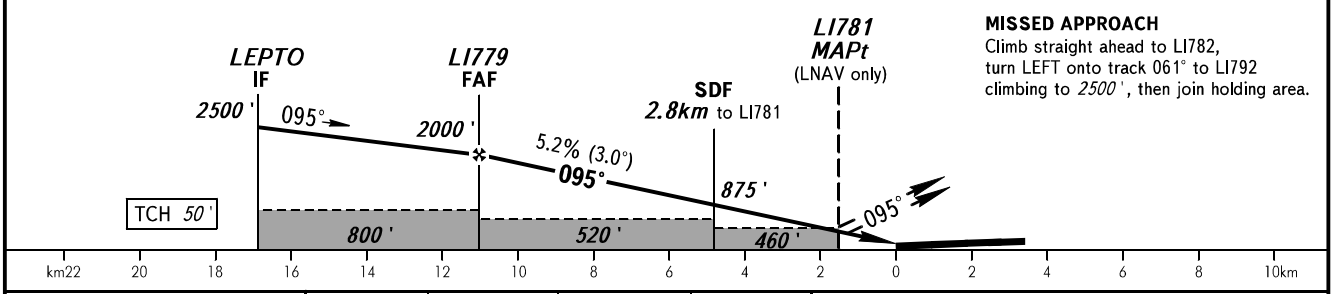

OCA(H)		A	B	C	D							
Straight-in Approach	LNAV	460' (400')	460' (400')	460' (400')	460' (400')							
	LNAV/VNAV	360' (300')	370' (310')	390' (330')	410' (350')							
Circling		690' (610')	790' (710')	900' (820')	1040' (960')							
GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390	420	450
RATE OF DESCENT	m/s	2.2	2.6	3.0	3.5	3.9	4.3	4.8	5.2	5.6	6.1	6.5
	ft/min	430	516	602	688	774	860	946	1032	1118	1204	1290

① TRANSITION LEVEL:
 - FL050 when QNH is 995.9 hPa (747mm mercury column) or above;
 - FL060 when QNH is 959.9 hPa (720mm mercury column) or above, but less than 995.9 hPa (747mm mercury column);
 - FL070 when QNH is less than 959.9 hPa (720mm mercury column).

NOTE
 Level flight segment is not AVBL before FAF.