INSTRUMENT APPROACH CHART - ICAO

GAGARIN RADAR	130.300
GAGARIN TOWER	122.850

SARATOV, RUSSIA
GAGARIN
ILS Y CAT I, LOC Y RWY 26

TRANSITION LEVEL: ❶
TRANSITION ALTITUDE: *3000 '*

AD ELEV: *103 '*
THR ELEV: *103 '*

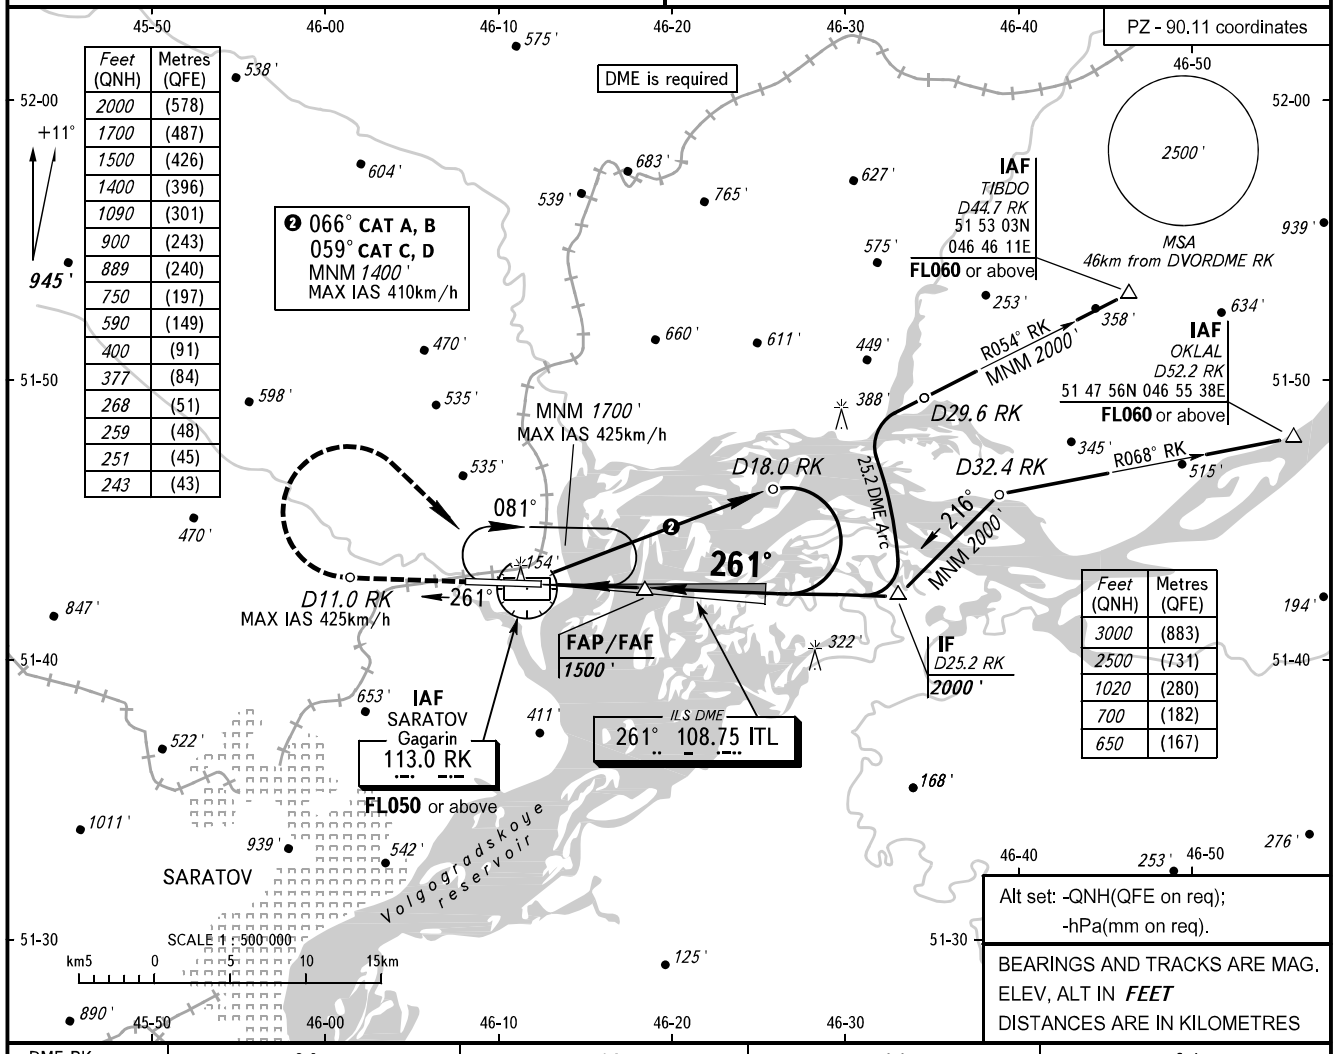

DME RK	2.0	4.0	6.0	8.4
ALTITUDE	*400 '*	*750 '*	*1090 '*	*1500 '*

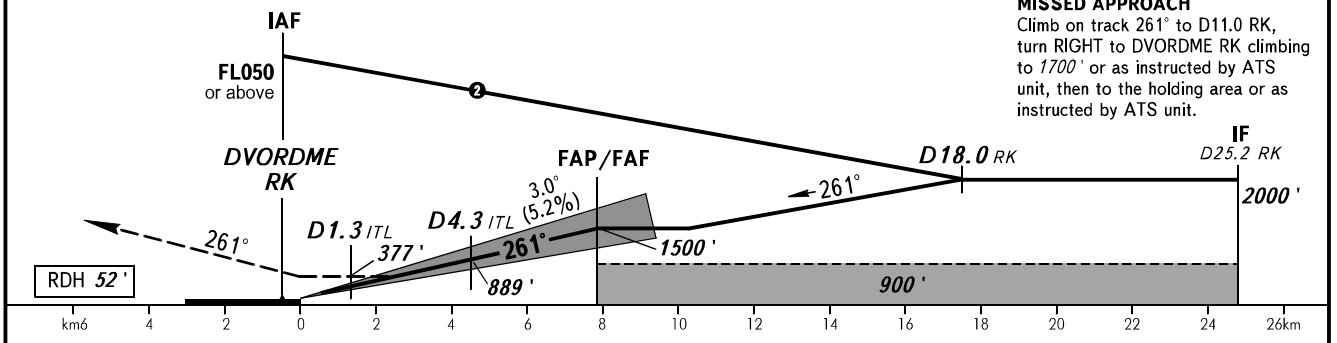

MISSED APPROACH
Climb on track 261° to D11.0 RK, turn RIGHT to DVORDME RK climbing to *1700 '* or as instructed by ATS unit, then to the holding area or as instructed by ATS unit.

OCA(H)		A	B	C	D
Straight-in Approach	CAT I	*243 ' (140 ')*	*251 ' (148 ')*	*259 ' (156 ')*	*268 ' (165 ')*
	LOC	*590 ' (480 ')*	*590 ' (480 ')*	*590 ' (480 ')*	*590 ' (480 ')*
Circling		*650 ' (550 ')*	*700 ' (600 ')*	*1020 ' (920 ')*	*1020 ' (920 ')*

❶ TRANSITION LEVEL:
- FL040 when QNH is 1013 hPa (760mm mercury column) or above;
- FL050 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column);
- FL060 when QNH is less than 977 hPa (733mm mercury column).

WARNING
Zero range of DME ITL is indicated at RWY 26 THR.

253° 090°

Visual manoeuvring south of AD is PROHIBITED.

CHANGE: New chart