


**AERODROME GROUND MOVEMENT
AND AIRCRAFT PARKING/DOCKING CHART - ICAO**

VYSHKA **125.900**
START **134.100**

MIRNY, RUSSIA

MIRNY

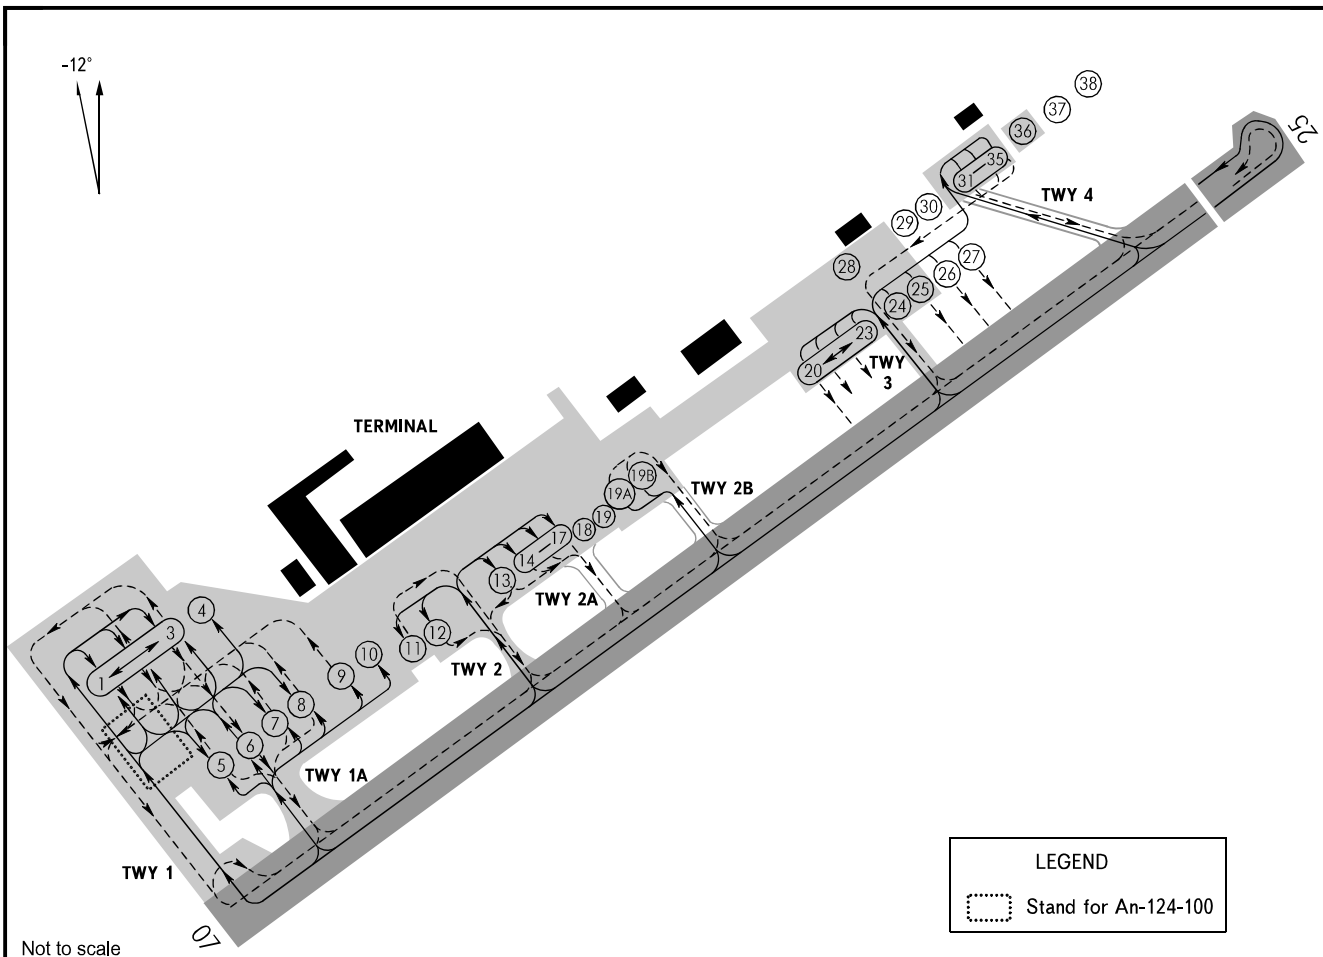

Not to scale

APRON:

STANDS:

Surface: 1-25, 19A, 19B, 28, 36 - Reinforced Concrete
31-35 - Asphalt
26, 27, 29, 30, 37, 38 - Grass

Strength: 1-4 - PCN 39/R/A/X/T
5-10 - PCN 48/R/A/X/T
11-25, 19A, 19B, 28, 36 - PCN 12/R/A/X/T
31-35 - PCN 12/F/B/Y/U
26, 27, 29, 30, 37, 38 - 8kg/cm²

TAXIWAYS:

Width: 1 - 22.5m (overall width including shoulders 40.5m)
1A - 52.5m
2 - 18.0m
2A, 4 - 60.0m
2B - 10.0m
3 - 14.0m

Surface: 1, 1A, 2, 3 - Reinforced Concrete
2A, 2B, 4 - Grass

Strength: 1 - PCN 24/R/A/X/T
1A - PCN 39/R/A/X/T
2, 3 - PCN 12/R/A/X/T
2A, 2B, 4 - 8kg/cm²

WARNING:

- Taxiing of A-319/320/321, B737-400/-500/-700/-800 ACFT via TWY 1 is PROHIBITED.
- Taxiing of ACFT via TWY 1, 1A, 2, 2A, 2B, 3, 4 at night and in the day-time under visibility 2000m and below shall be carried out after "FOLLOW ME" vehicle.
- Taxiing on apron and via TWY shall be carried out at minimum taxiing speed and strictly along TWY centre line.
- Due to local features of ACFT parking on the apron, the flight crew must observe maximum caution and strictly follow marshaller's instructions.
- A 180-degree turn of class 1 and 2 ACFT on RWY 07/25 shall be executed on RWY turn pad only. Turns are RIGHT on the runway turn pad at RWY 07 THR. Turns are LEFT on the runway turn pad at RWY 25 THR.

ACFT types:

B737-400/500/700/800, A-319, A-320, A-321, SSJ-100, Tu-134, Yak-42, An-12, An-148, ATR-42, ATR-72, CRJ-100/200, DHC-8 Q300, DHC-8 Q400, Be-200, Mi-26, EMB-170 and modifications
1-4
Ii-76, B737-400/500/700/800, B757-200, A-319, A-320, A-321, Tu-204/214, SSJ-100, Tu-134, Yak-42, An-12, An-148, ATR-42, ATR-72, CRJ-100/200, DHC-8 Q300, DHC-8 Q400, Be-200, Tu-154, EMB-170 and modifications
5-8
B737-400/500/700/800, A-319, A-320, A-321, SSJ-100, Tu-134, Yak-42, An-12, An-148, ATR-42, ATR-72, CRJ-100/200, DHC-8 Q300, DHC-8 Q400, Be-200, Tu-154, EMB-170 and modifications
9, 10
An-24, An-26, An-140, An-38, An-28, An-30, L-410
11-19
An-38, An-28
19A-19B
Mi-8, Mi-171
20-30
An-2, An-3
31-35
Mi-26
36-38

An-124-100 - stand on the apron between stands 1, 2 and stand 5

Stands designated for specified ACFT types are AVBL for other class below ACFT.

STANDS:

CHANGE: New chart